

An Updated Life Cycle Study - The Use of Disposable and Reusable Nappies in the UK

Confidential Draft Final Report

March 2008

CONTENTS

1	<i>INTRODUCTION AND SCOPE OF THE STUDY</i>	1
1.1	<i>PRODUCT SYSTEMS AND SYSTEM BOUNDARIES</i>	4
1.2	<i>THE DISPOSABLE NAPPY SYSTEM</i>	4
1.3	<i>HOME LAUNDERED REUSABLE NAPPY SYSTEMS – SHAPED AND PREFOLD</i>	7
1.4	<i>INCLUSIONS/EXCLUSIONS</i>	11
1.5	<i>KEY ASSUMPTIONS AND LIMITATIONS</i>	12
1.6	<i>DATA REQUIREMENTS</i>	12
1.7	<i>INVENTORY ANALYSIS AND IMPACT ASSESSMENT</i>	14
2	<i>INVENTORY DATA FOR REUSABLE NAPPIES</i>	15
2.1	<i>SHAPED NAPPY NUMBER, WEIGHT AND MANUFACTURE</i>	15
2.2	<i>WRAPS</i>	15
2.3	<i>WASHING DATA</i>	15
3	<i>INVENTORY DATA FOR DISPOSABLE NAPPPIES</i>	23
3.1	<i>DISPOSABLE NAPPY NUMBER, WEIGHT AND MANUFACTURE</i>	23
3.2	<i>WASTE MANAGEMENT</i>	23
4	<i>RESULTS</i>	25
4.1	<i>SHAPED NAPPIES</i>	25
4.2	<i>DISPOSABLE NAPPIES</i>	29
5	<i>CONCLUSIONS</i>	32

This study builds on a previous study for the Environment Agency, entitled Life Cycle Assessment of Disposable and Reusable Nappies in the UK, ISBN: 1-84-432427-3, and is considered an addendum to the previous study.

Environmental Resources Management Limited (ERM) was asked by the Department for Environment, Food and Rural Affairs (Defra), the Environment Agency and the Waste Resources Action Programme (WRAP) to update the previous life cycle assessment (LCA) study by assessing the changes in the environmental profile of disposable and reusable nappies that have resulted from developments in the manufacture and use of disposable and reusable nappies systems in the UK since 2002/03.

Factors addressed in the study included: further weight reduction of disposable nappies; the inclusion of shaped nappies; the changed energy efficiency and different usage of washing machines and driers; and changes to waste disposal options, including the use of reusable nappies for a second child.

For this study ERM aimed to obtain:

- updated energy generation data;
- updated energy consumption data for washing machines and tumble driers;
- updated manufacturing data for disposables;
- updated waste management data for disposables;
- new manufacturing data for shaped nappies; and
- new manufacturing data for prefold nappies (not obtained so were excluded from the study).

The goal of the study was split into the following objectives:

- to update the previous study ⁽¹⁾ with changes in the market place between 2002/03 and 2005/06, to include an assessment of the effects of a range of behavioural assumptions on the life cycle environmental impacts of the re-usable nappy types and to compare these with each other and with modern disposable nappies;

to compile a detailed life cycle inventory of the environmental burdens associated with the production, use and disposal of shaped and prefold reusable ⁽²⁾ nappies and disposable nappies; and

(1) Life Cycle Assessment of Disposable and Reusable Nappies in the UK, Environment Agency, ISBN: 1-84-432427-3

(2) no data was forthcoming from prefold manufactures therefore they were excluded from this study.

- to use the life cycle inventory data to compare the environmental impacts arising from reusable and disposable nappies under the various scenarios considered.

The study aimed to inform, through simplification of parameters and clearly defined scenarios, the audience about the significance and scale of the environmental impact of nappies generally, as well as, and how, actions that can be, and have been, undertaken by manufacturers and users of nappies affect the environmental profiles.

The project was governed by a board comprising Defra, WRAP and the Environment Agency. The board agreed that ERM would consider up to 10 scenarios; four for disposable nappies, and six for reusable nappies. The board also specified the scenarios to be assessed.

The scope of the study is consistent with the previous study with the exception of the updated data above and the aim of the study to reflect potential impacts in 2006.

The functional unit used is the same as that used in the previous study ⁽¹⁾. It is appropriate to the goals of the study, and is defined as **“the use of nappies during the first two and a half years of a child’s life”**. This functional unit results in a specific quantity of disposable and reusable nappies used within the time period of two and a half years.

The reason for focusing on the first two and a half years is that by this point nappy use is tailing off. Beyond this point, nappy use varies considerably because children are at different stages of toilet training. Although they may still use training pants, and/or overnight nappies, the use of these types of products is outside the scope of this study.

1.1 NUMBER OF CHANGES

In support of the previous study the Environment Agency commissioned surveys of both disposable and reusable nappy use. These surveys (Environment Agency, 2004) determined that the average child is out of nappies at 2 years 2 months (same for both type of nappy) and that after 2.5 years 95 per cent of all children are out of nappies. The study reflects the first 2.5 years of an average child’s life in the UK. Therefore, the systems modelled take account of those children who stop using nappies earlier than 2.5 years, see

Table 1.1.

(1) Life Cycle Assessment of Disposable and Reusable Nappies in the UK, Environment Agency, ISBN: 1-84-432427-3

The time children spend in nappies is specific to the individual, but the majority of children have undergone toilet training under the age of 2.5 years. Although they may still use training pants or overnight nappies for a significant period beyond this point, the use of these types of products is outside the scope of this study.

Table 1.1 *Children wearing nappies by child age (all types of nappy)*

Age of child	Children wearing nappies (%)	Children not wearing nappies (%)
up to 6 months	100.0%	0.0%
6 to 12 months	95.7%	4.3%
12 to 18 months	82.8%	17.2%
18 to 24 months	45.6%	54.4%
24 to 30 months	17.6%	82.4%
30 to 36 months	4.8%	95.2%
36 to 42 months	1.8%	98.2%
42 to 48 months	0.4%	99.6%
48 to 54 months	0.1%	99.9%
54 to 60 months	0.1%	99.9%
60 to 66 months	0.1%	99.9%

Source: The Environment Agency surveys (Environment Agency, 2004)

Note: The surveys showed that there is no difference in age out of nappies between children using reusable or disposable nappies. The figures in the table are for disposable nappies for which there were more results but were applied to all children.

Note: The surveys showed that there is no difference in age out of nappies between children using reusable or disposable nappies. This table is true for all children.

The UK sales figure for disposable nappies in 2001-2002 provided an average daily use figure of 4.16 nappies a day, based on a market penetration of 96.4 per cent (Environment Agency, 2004). The EA surveys found that number of changes per day for children still using disposables starts at 7 and decreases to 5 by 2.5 years. When the decreasing population is accounted for, the Environment Agency surveys suggested a change frequency, for disposable nappy users (both in and out of nappies), between 4.05 and 4.4 per day over 2.5 years. Due to the clarity of the survey questions and responses, the Agency statistician deemed a daily change of 4.16 to be appropriate and one that is supported by the surveys. An average daily change figure of 4.16 has therefore been used in the assessment of the disposable nappy system.

The Environment Agency surveys found that the average number of changes per day for those children still using cloth nappies starts at 8 and decreases to 6 by 2.5 years. The average daily number for children still in reusable nappies was calculated to be 6.1 changes (EA, 2004). The average number of changes per day, over the first 2.5 years, for all children (those in and out of nappies) who used cloth nappies was established to be 4.3 - 4.7 changes (accounting for both children in and out of nappies).

The previous LCA study and this addendum takes account of the decreasing population of children in nappies over the 2.5 years. Therefore the results reflect an average child and not a child in nappies for the full 2.5 years.

1.2 *PRODUCT SYSTEMS AND SYSTEM BOUNDARIES*

The nappy systems assessed included all life cycle stages. All energy and materials used was traced back to the extraction of resources. Emissions from each life cycle stage were quantified. Waste management and waste water treatment processes and their environmental releases were included ⁽¹⁾.

1.3 *THE DISPOSABLE NAPPY SYSTEM*

Disposable nappies typically consist of a plastic outer layer with integral fastenings and a core of absorbent materials with a protective top layer. The nappy core is composed of fluff pulp (cellulose fibre) and a water-absorbent polymer, sodium polyacrylate (SAP). The function of the core is to absorb liquid excreta. The top layer is made up of a 'non-woven' polymer-based material with a textile structure. From the top layer, the fluids flow through a pulp-based tissue layer down to the core. Leakage is prevented by a plastic bottom layer and by elastic barriers. The nappy is prevented from falling off by rubber waist elastics and is fastened around the child's waist by velcro like materials. The different materials in the nappies are glued together with polymer-based adhesives. The packaging consists of polyethylene plastic bags and corrugated board boxes.

The nappies are distributed from the manufacturers either directly to retailers, or via distribution centres maintained by the manufacturers. The retailers are grocery chains, independent grocers or chemists. Customers pick up their nappies at the retailer and transport them home for use. Used nappies, containing excreta are discarded along with other municipal waste, and will later on end up consigned either to landfill, mechanical-biological treatment (MBT) or to incineration.

The main disposable nappies in the UK are very similar in terms of composition and use. ERM combined the composition and weight of nappies sold in the UK in a particular year and calculated the 'average nappy'. This average nappy takes account the fact that the size of the nappies used over the baby's first two and a half years will change depending on the baby's age and size.

Most of the disposable nappies that are sold in the UK are also manufactured in the UK, although several raw materials are acquired from other European

(1) Waste management processes are treated in the same way as other processes within the life cycle. The potential impact contributions of the emissions that arise from each process are quantified. The utilisation of a process in itself is not considered an impact, therefore it is not reported as such.

countries or from North America. These considerations have been included in the study.

Table 1.2 presents the average composition of a UK disposable nappy for 2006.

Table 1.2 *Average UK Disposable Nappy Composition and Weight (2006)*

	Total	Fluff pulp	SAP	PP	LDPE	Adhesives	PET/polyester	Other
Units	g	%	%	%	%	%	%	%
Average unit weight	38.6	34.1	32.4	16.6	6.0	3.8	2.2	4.8

Using the average of 4.16 nappies used per day from the previous study and an average nappy weight of 38.6g, an average child will use 146.5kg of nappies over the two and a half year period.

The manufacturers of disposable nappies have provided manufacturing data representative of 2006 conditions. These data were used to characterise an 'average' manufacturing plant based on market share.

The study included all the significant processes, tracing material and energy flows to the point where material and energy are extracted or emitted to the natural environment. Due to the complexity of the product system, it is impractical to draw a full system diagram that includes all processes where human influence occurs. Figure 1.1 details the main life cycle stages that are included in the life cycle of disposable nappies.

1.3.1 *Disposable Nappy Scenarios*

For the disposable nappy systems, alternative scenarios are limited, as these would require action from the manufacturers and or action from local authorities for the provision of alternative waste management systems.

The manufacturers have reduced the environmental impact of disposable nappies through product design and development. Since 2001/02 the industry has reduced the weight by 11% through nappy design changes and the development of materials. It is expected by the industry that this scale of reduction will continue in the short term. We have assessed the potential implication of future light-weighting in a sensitivity analysis.

Alternative waste management routes that used disposable nappies will follow include separate collection for anaerobic digestion or recycling and diversion with household waste through MBT. Examples of recycling or digestion schemes that have been offered include:


- Almere (diaper biowaste household collection and biodigesting) project in Holland; and

- Knowaste LLC who have reported diaper recycling programs in the European Union, Asia and North America.

Due to a lack of detailed process data for nappies in these processes, ERM has estimated, as a sensitivity analysis, the environmental impacts associated with alternative waste management routes.

CONFIDENTIAL DRAFT

Figure 1.1 System Boundary for the Disposable Nappy System

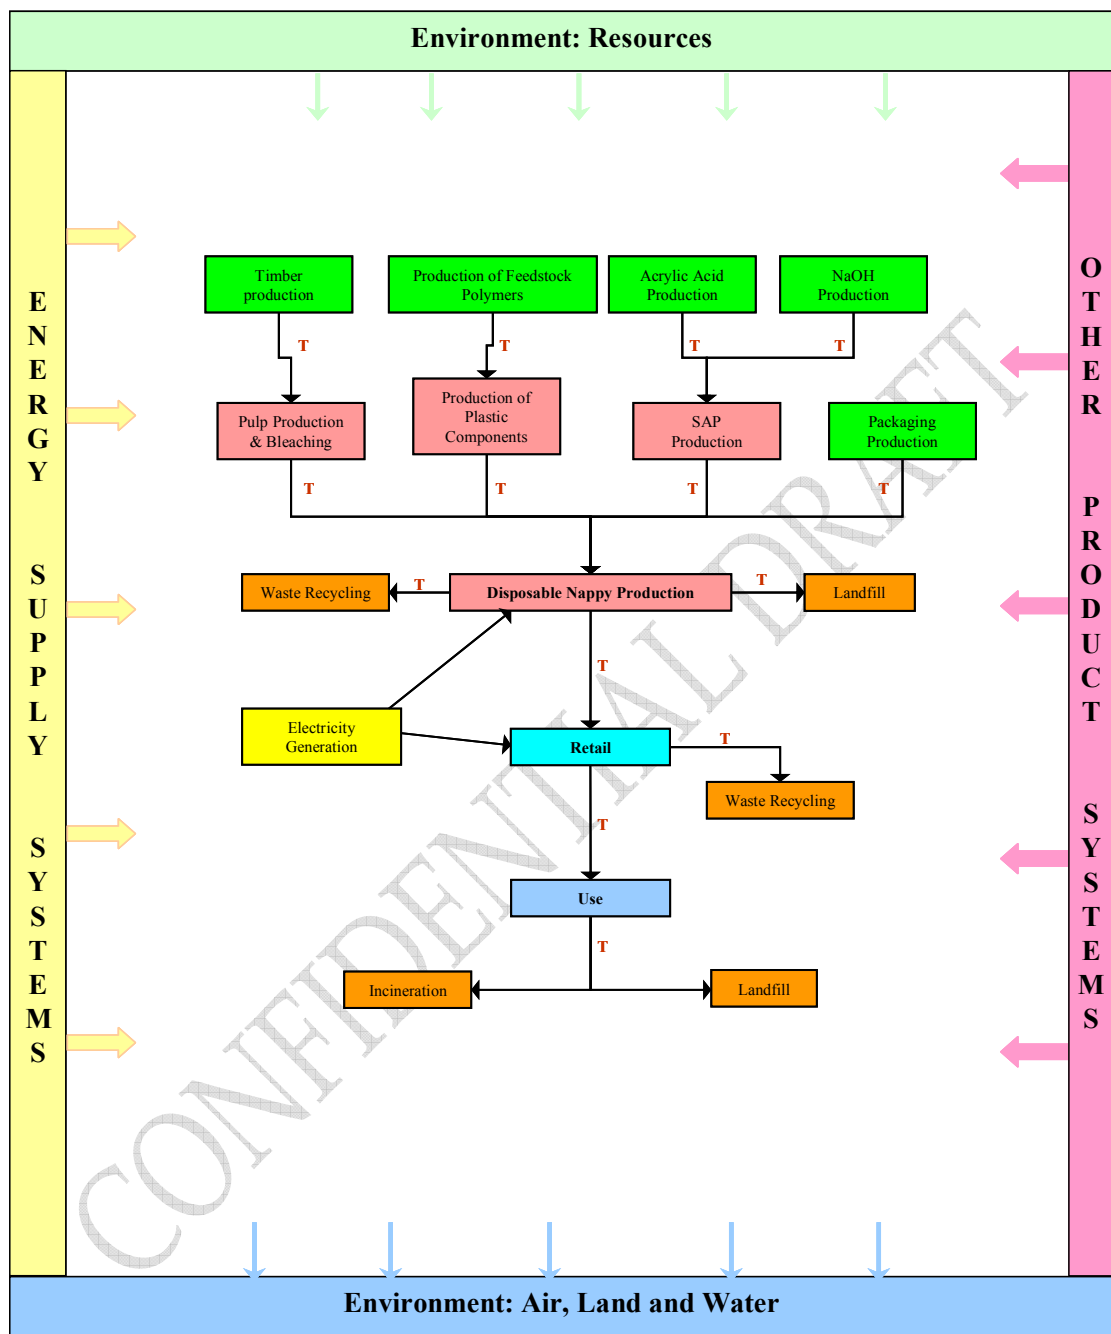

Nb. the main transport steps between processes and life cycle stages have been included in the assessment. Waste management activities associated with production and the supply chain have also been included in the assessment.

1.4 HOME LAUNDERED REUSABLE NAPPY SYSTEMS – SHAPED AND PREFOLD

In the previous study terry and prefold nappies were assessed, as these were the most popular in 2002/03. However, subsequent market analysis by WRAP (*pers. comm.* Julian Parfitt, WRAP) indicates that shaped and prefold

nappies now have the greatest market share. This study considered home laundered shaped nappies. It was intended that prefolds would also be included. However, no updated manufacturing data on prefolds was forthcoming.

Reusable cotton nappies come in a number of types. Nearly all are fitted and fastened with poppers and or velcro straps instead of pins. The different nappy systems can be divided into the following categories:

- all-in-ones - shaped, fitted nappies with velcro or popper fastenings, which include a waterproof cover. No folding or pinning is required;
- shaped nappies - similar to all-in-ones, but wraps or pants have to be purchased separately to provide the waterproof cover. These do not require folding. They are fastened by velcro or poppers; and
- prefolds - requires folding and a separate waterproof wrap/pant, with fasteners used in some cases.

All-in-ones and shaped nappies are generally considered easier to use than flat/prefold nappies, in that no folding is required. Shaped nappies either have velcro or popper fastenings, or rely solely on the wrap/pant to hold them in place.

Prefold nappies are made from woven cotton and consist of a large rectangle of fabric that has been folded and stitched into three panels; the centre panel being thicker than the two outer panels. Prefolds are considered to be easier to dry than all-in-ones and shaped nappies.

Wraps/pants are used to hold up nappies and to prevent leakage. They are made from different materials and combinations of materials, such as: nylon; polyester; cotton; wool; PVC; EVA; hemp; and polyurethanes. Wraps/pants are not considered as durable as nappies to washing, drying and wear, and hence they may need to be replaced. For any given size, the frequency of replacement is dependent on the care they receive. Following manufacturers' care guidance is essential for maximising the lifetime of the wrap/pant. Some wraps/pants are adjustable and are designed for use from birth to potty; others are replaced when necessary to fit a growing baby. Generally, three different sizes will be needed over the two and a half year period.

In combination with the nappies and wraps/pants, parents can use liners and booster pads to improve performance and ease of cleaning. Liners are used to provide a drier layer between the baby and the absorbent nappy and to assist in containment of faecal matter for ease of cleaning. Liners come in reusable or disposable forms. Materials used include: paper; polypropylene; fleece; and silk. It is sometimes necessary to boost the performance of a nappy by using booster pads. The study has not included booster pads in the assessment.


The major retail routes for reusables appear to be through high street shops, mail order and via the internet.

Figure 1.2 details the main life cycle stages that have been included in the life cycle of home laundered shaped (sized) nappies. All key material, energy and waste streams are traced to the point at which environmental flows cross the system boundary.

Reusable nappies are sold in birth to potty packs and ERM used samples of these packs, together with data provided by suppliers, to specify reusable nappy consumption. Table 1.3 the contents of a shaped nappy birth to potty pack.

Manufacturers of each type of reusable nappies were contacted for manufacturing data through the Nappy Alliance.

Figure 1.2 System Boundary For Home Laundered Reusable Nappy System

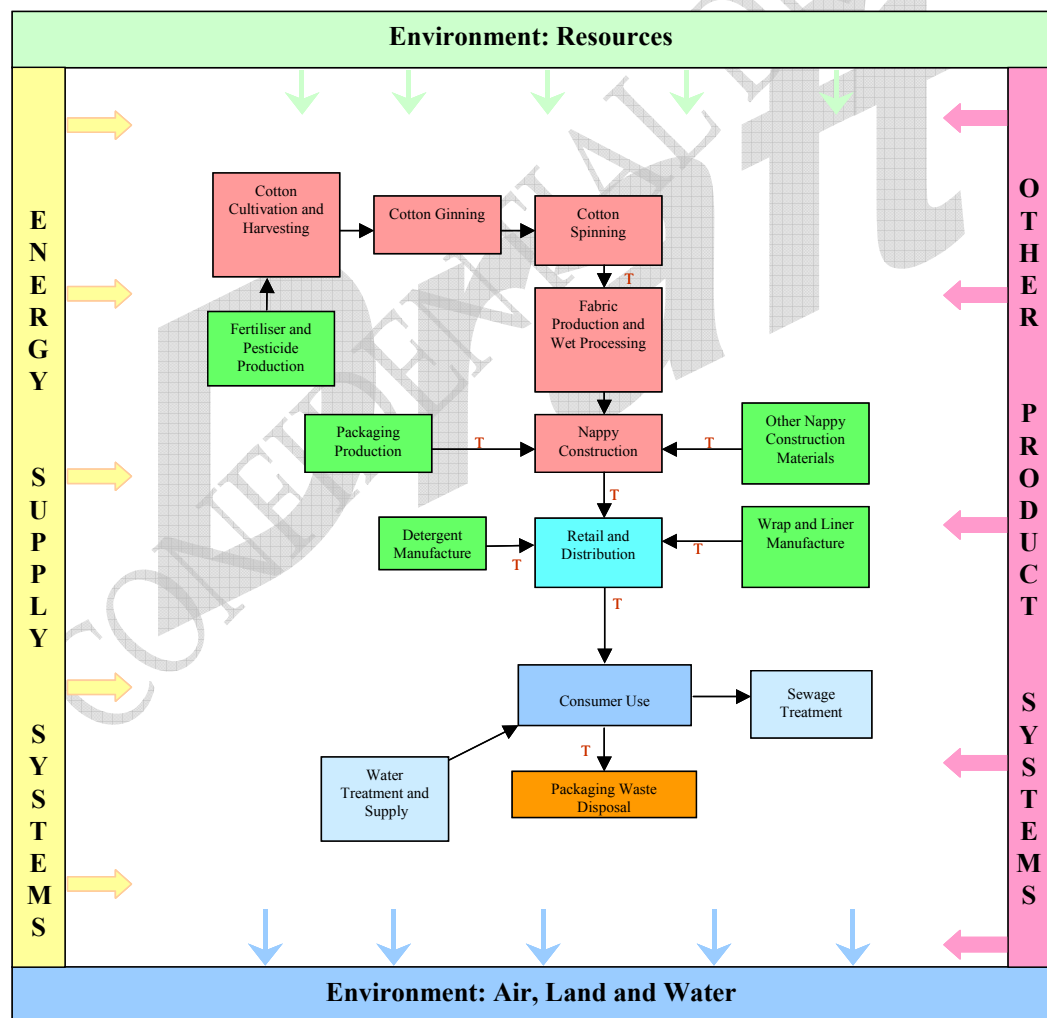

Nb. the main transport steps between processes and life cycle stages have been included in the assessment. Waste disposal activities associated with production and the supply chain have also been included in the assessment.

Table 1.3 Shaped Birth to Potty Pack

	Weight per item (grams)	No of items	Material	Total (grams)
Nappy size 1	132	15	95.5% cotton 4.5% velcro	1980
Nappy size 2	164	15	96.7% cotton 3.7% velcro	2460
Packaging size 1	42	1	LDPE (15 nappies/bag)	42
Packaging size 2	38	1	LDPE (15 nappies/bag)	38
Wrap size S	54	4	<i>Same composition assumed as for size L, see below</i>	216
Packaging wrap size S	8	1	LDPE (4 wraps per package)	8
Wraps size M	58	4	<i>Same composition assumed as for size L, see below</i>	232
Packaging wraps size M	8	1	LDPE (4 wraps per package)	8
Wraps size L	58	4	Analysed: 6g velcro; 4g lining (unidentified plastic material); 30g unidentified plastic laminated fabric material; 18g cotton (all per wrap)	232
Packaging wraps size L	8	1	LDPE (4 wraps per package)	8
Liners	138	20	Paper; 14g/10 liners = 100 liners per roll	2760
Packaging liners	42	1	LDPE (20 rolls/bag)	42
Total		68		8026

1.4.1 Home Laundered Scenarios to be Assessed

ERM has approached this study in a different way from the previous study, which used the results of a survey commissioned by the Environment Agency. For the baseline scenario ERM assumed that nappies are used on one child only, dry-pailed (not soaked in sanitising solution) and washed in a washing machine with an average energy efficiency rating for appliances owned in 2006 ⁽¹⁾. ERM also used average use of average tumble driers and washer-driers from the same source. ERM assumed that three-quarters of nappies are line dried outside and the remainder are tumble dried. Nappies are assumed to be washed with wraps at 60°C, the minimum temperature recommended by the Department of Health. Each wrap is assumed to be used twice between washes.

With the agreement of the Project Board, ERM developed scenarios to demonstrate the environmental benefits of separate user choices, such as: reduced temperature washing; using more energy efficient appliances; and high/low utilisation of tumble driers. With the exception of the baseline and reuse on a second child, the scenarios are considered to be extremes, rather than general practice. For example, it is not possible for everyone to line dry outside, and it is not practicable for anyone to line dry all the time, nor is it likely that many people will always tumble dry.

(1) From Market Transformation Programme

The objective of showing the effect of these scenarios separately is to indicate the environmental costs of different actions, so that people understand how environmental advantageous is any action they may choose. The scenarios are presented in *Table 1.4*.

In addition to these scenarios the study has considered, in a sensitivity analysis, the scale of the benefit that can be achieved by combining some of these choices, *viz*; reuse on a second child; high load efficiency; and 100% line drying. The study has also considered, in a sensitivity analysis, the scale of environmental harm that can be done through a high energy consumption scenario, of 100% tumble drying and washing at a high temperature.

Table 1.4 *Cloth Nappy Behaviour Scenarios to be Assessed*

	Dry Pailing	Pre-wash	Nappy Wash Temp	Tumble Drying	Load	Energy Efficiency	Wrap Washing with Nappies	Wrap Washing at 40° with other clothes
Scenario 1 Baseline	Yes	Yes	60°C	MTP average??	Calculated	MTP average	Yes	No
High efficiency	Yes	Yes	60°C	MTP average	Calculated	A+ rated	Yes	No
High load efficiency ² :	Yes	Yes	60°C	MTP average	3 day wash	MTP average	Yes	No
High temperature	Yes	Yes	90°C	MTP average	Calculated	MTP average	No	Yes
100% tumble Drying	Yes	Yes	60°C	100%	Calculated	MTP average	Yes	No
100% line Drying	Yes	Yes	60°C	No	Calculated	MTP average	Yes	No
100% use on second child	Yes	Yes	60°C	MTP average	Calculated	MTP average	Yes	No

Notes:

- 1) Unlike the previous study where 9.5% of users were found to iron nappies, ERM has assumed for this assessment that no ironing occurs.
- 2) For the high load efficiency scenarios, ERM has assumed a 33% increase in the number of nappies and wraps owned and washing every 3 days compared with every 2 days for the other scenarios.

1.5 INCLUSIONS/EXCLUSIONS

As in the previous study, and in line with accepted LCA practice, ERM has excluded capital equipment and workforce burdens from both the reusable and disposable nappy systems.

1.5.1 Excreta

Excreta is considered within the system boundaries when comparing disposable and reusable nappy systems. The main reason for this is that both nappies and excreta will undergo a different type of waste treatment in each case, due to the different characteristics of the systems.

For disposable nappies, ERM believes that it is reasonable to assume that all excreta will be disposed together with the nappies. Consequently, excreta will follow the household waste stream from the nappy waste bin in the home to landfill, MBT and incineration facilities in the UK.

For users of home laundered reusable nappies, a proportion of the excreta will be flushed down the toilet, together with soiled disposable liners, before the nappies are washed. This effluent will enter the sewerage system. The remaining excreta will also enter the sewerage system through the washing machine outflow. Sewage treatment has been modelled on the basis of typical sewage treatment processes in the UK.

1.6 *KEY ASSUMPTIONS AND LIMITATIONS*

Changes to the assumptions in the previous study have been recorded and are presented in this report.

1.7 *DATA REQUIREMENTS*

In addition to collecting data describing the manufacture of the nappy types assessed, the following are identified as key elements for which new inventory data were required:

- UK electricity generation (2005/06) by type (eg coal, gas, nuclear, hydro, wind etc.);
- washing machine performance;
- tumble drier performance; and
- waste management.

1.7.1 *Disposable Nappy Systems*

The manufacturers of disposable nappies supplied data describing both the average composition and weight of a disposable nappy in 2006, and the average manufacture of disposable nappies.

Material life cycle inventories associated with the manufacture of disposables were the same as those provided previously by EDANA.

The *WRATE* software and supporting literature was used to model the disposal of disposable nappies, replacing the *WISARD* software previously used.

1.7.2 *Home Laundered Reusable Nappy System*

The type of nappies to be assessed and the use scenarios considered were agreed with the Project Board. For the nappy types specified, shaped and prefold, ERM purchased a birth to potty pack for each. These were used,

along with manufacturing data, to specify a typical composition and weight of each nappy type and their associated wraps.

To assist ERM in defining the manufacturing process for the reusable nappy system, a survey of nappy manufacturers was undertaken. ERM provided questionnaires to manufacturers, WRAP and reusable nappy industry representatives.

ERM sourced data from the Market Transformation Programme (MTP) UK data for UK washing machine and tumble drier performance.

The data collection for reusable nappies for this study has been limited to:

- manufacturing data for nappies, wraps and liners; and
- updated energy and water consumption data for washing machines and tumble driers.

ERM amended the behavioural data that the Environment Agency found from the surveys it commissioned for the previous study to reflect the scenarios as described.

All other data used to model the scenarios described above was extracted from the previous study.

1.7.3 *Data Quality Requirements*

The key requirements regarding data quality are that data are as accurate and representative as possible of nappies used in the UK in 2006.

Data have been collected from the following sources:

- questionnaires and interviews with experts regarding the foreground system;
- validated life cycle inventory databases for the background system;
- literature for the background system;
- Time to Change?: A Study of How Parents and Carers Use Disposable and Reusable Nappies (Environment Agency Science Report), ISBN: 978-1844324521; and
- Life Cycle Assessment of Disposable and Reusable Nappies in the UK, Environment Agency, ISBN: 1-84-432427-3.

The data collected for, and used in this study were documented and assessed with regard to their quality. The data used were selected on the basis of availability and on how representative they are of nappy systems in the UK in 2006.

Similar inventory analysis and impact assessment methods as in the previous study were used for this study. ERM has reported significant inventory items such as energy and water use separately. All new data and assumptions have been documented.

CONFIDENTIAL DRAFT

2.1 *SHAPED NAPPY NUMBER, WEIGHT AND MANUFACTURE*

Based on two complete sets of manufacturing data for shaped nappies, and the specifications of further popular shaped nappies, an average weight of 139.3g per nappy has been assumed. The nappies are 100% cotton. ERM has assumed, based on the birth to potty pack and guidance from other suppliers that a minimum of thirty nappies are required over the two and a half year period that a child is in nappies.

2.2 *WRAPS*

Based on the birth to potty pack for shaped nappies, and a survey of two other wrap types, ERM assumed an average wrap weight of 47.6g, and that a minimum of 12 wraps are required for the two and a half year period.

Only one complete set of manufacturing data for wraps was obtained, and this has been used in the assessment. The composition of these wraps was: 21% cotton; 39% polyester; and 40% polyurethane.

2.3 *WASHING DATA*

ERM used data relating to domestic washing and drying that represent 2005 and 2006 in the UK. These data were sourced primarily from Defra's Market Transformation Programme (MTP), from the online 'What if? Tool'. The tool provides forecast data from 1999 up to 2020 for the consumption of electricity and water for washing machines (WMs), washer/driers (WDs) and tumble driers (TDs).

Based on these data, ERM calculated domestic washing and drying performance in the UK for the following:

- UK stock average performance for:
 - water use; and
 - electricity use.

- UK 'most efficient' performance for:
 - water use; and
 - electricity use.

2.3.1

Summary of Washing and Drying Performance

Table 2.1 shows the electricity and water use figures for washing used by ERM in the study. These figures were calculated from the more detailed data shown in Section 2.3.2. The stock average figures represent the market average performance for washing machines and washer/driers, based on electricity and water consumption by energy label class. The numbers in Table 2.1 exclude electricity and water consumption for a pre-wash cycle. ERM estimated an average pre-wash cycle, based on an Öko-Institut (2005) LCA study of washing machines in Germany. No data were available describing temperature or frequency of pre-washing in the UK. ERM assumed that a pre-wash is run as cold wash and consumes a minimum quantity of electricity and water, as shown in Table 2.2. It was assumed that a pre-wash is used before every washing cycle for nappies.

Table 2.1 Summary of UK Washing Performance

Washing Temperature	Electricity Use: Stock Average	Water Use: Stock Average	Electricity Use: A+ Rated Washing Machine	Water Use: A+ Rated Washing Machine
°C	kWh per load	litres per load	kWh per load	litres per load
40	0.74	70	0.60	46
60	1.04	70	1.00	46
90	1.85	70	1.66	46

Table 2.2 Pre-Washing Performance

Washing Temperature	Electricity Use: Average	Water Use: Average
°C	kWh per load	litres per load
20	0.25	35

Source: (Öko-Institut, 2005)

Note: Data provided in the Öko-Institut report provides an estimate for a minimum electricity and water consumption per load. ERM assumed this to be equivalent to a pre-rinse cycle.

Table 2.3 shows the electricity and water use figures for drying. These figures were calculated from the more detailed data shown in Section 2.3.3. The stock average figures represent the market average performance for washer/driers and tumble driers based on electricity and water consumption by energy label class.

Table 2.3 Summary of UK Drying Performance

Electricity Use: Stock Average	Water Use: Stock Average	Electricity Use: A-Rated Tumble Drier	Electricity Use: Stock Average A-Rated Drier
kWh per load	litres per load	kWh per load	kWh per load
2.99	19	1.71	1.88

2.3.2

UK Washing Data and Assumptions

The data used to calculate UK washing performance (combination of washing machines and washer driers) are presented below, including data for the following:

- washer stocks;
- washer energy consumption;
- washer water consumption; and
- washer load size.

Washer Stocks

Table 2.4 shows a breakdown of the stocks of washing machines and washer/driers for the UK in 2005/06, according to energy class.

Table 2.4 *UK Washer Stocks 2006*

Type	Model	Stock 2006
Washing machines	A+ rated	720 011
	A rated	7 724 644
	B rated	4 018 681
	C rated	3 135 109
	D rated	663 254
	E rated	234 888
	F rated	110 332
	Other	3 734 567
	Total	20 341 485
Washer/driers	A+ rated	-
	A rated	32 962
	B rated	541 715
	C rated	1 086 161
	D rated	1 103 089
	E rated	150 972
	F rated	826 237
	G rated	239 938
	Total	3 981 075

Source: (MTP, 2007)

Washer Water and Energy Consumption

Table 2.5 shows the consumption of electricity for washing machines per load, according to energy class in 2006. Table 2.6 shows the water consumption of washing machines by energy class. UK stock average consumption figures were calculated from these data.

CONFIDENTIAL DRAFT

Table 2.5 Washing Machine Energy Consumption per Load by Energy Class

Energy Class	A+	A	B	C	D	E	F
	kWh	kWh	kWh	kWh	kWh	kWh	kWh
90°C	1.66	1.77	1.77	1.86	2.32	2.5	2.69
60°C	1.00	1.06	1.06	1.12	1.39	1.50	1.61
40°C	0.60	0.64	0.64	0.67	0.83	0.90	0.97

Source: (MTP, 2007a)

Table 2.6 Washing Machine Water Consumption per Load by Energy Class

Energy class	A+	A	B	C	D	E	F	G
	litres	litres	litres	litres	litres	litres	litres	litres
60°	-	53	61	75	86	94	109	163
Adjusted for reduced load	-	46	53	65	75	82	95	142

Source: (MTP, 2007a)

From testing conducted by MTP, a typical consumer wash is usually less than a full load, using 13% less water. Table 2.6 accounts for this reduced water use which has been assumed to be average behaviour in the UK.

Washer/Driers

Table 2.7 and Table 2.8 show the consumption of electricity and water for washer driers per load according to energy class, in 2005/06. Data were not available for washing energy consumption. ERM assumed that an average washer/drier has the same electricity consumption as a B-rated washing machine per load. Additionally, water consumption data only cover energy ratings B to D. When calculating stock average water consumption we have only considered these energy ratings. Other ratings were excluded. This assumption covers approximately 70% of washer/driers on the market.

Table 2.7 Washer/Drier Energy Consumption for Washing per Load by Energy Class

Stock Average	
	kWh
90°C	1.77
60°C	1.06
40°C	0.64

Note: ERM assumed that an average washer/drier has the same electricity consumption as a B-rated washing machine per load.

Table 2.8 Washer/Drier Water Consumption for Washing per Load by Energy Class

Energy class	A+	A	B	C	D	E	F	G
	litres	litres	litres	litres	litres	litres	litres	litres
60°	-	-	51	61	61	-	-	-

Source: (MTP, 2007a)

Washing Load

In terms of washing load, according to MTP (2007a), the UK average washing machine capacity is 5.6kg. Additionally, *Table 2.9* shows the load capacity data available from MTP. Data were only available for class A+ and class C. For the study we have assumed an average load of 2.8kg for a wash load.

Table 2.9 *Washing Machine Load Capacity by Energy Class*

Energy class	A+	A	B	C	D	E	F	G
	kg	kg	kg	kg	kg	kg	kg	kg
Washing capacity	5.86	-	-	4.86	-	-	-	-

Source: (MTP, 2007a)

2.3.3 UK Drying Data and Assumptions

The data used to calculate the drying performance are presented below, including data for the following:

- drier stocks;
- drier energy consumption;
- drier water consumption;
- drier load; and
- frequency of drying.

Drier Stocks

Table 2.11 shows a breakdown of the stocks of driers for the UK in 2005/06, according to energy class. *Table 2.4* shows a breakdown of stocks of washer/driers.

The Office for National Statistics (ONS) publish data relating to tumble drier household ownership in the UK. From 1994 to 2002/03 tumble drier ownership by household has increased from 50% to 56% (ONS, Table 9.3, Ref D7611). The ONS also publishes data relating to ownership by household type, which suggests that tumble drier ownership is higher in households with children. In households with two or more children ownership ranges between 61 and 76%.

Table 2.10 *Tumble Drier Ownership Amongst Households with Children*

Composition of Households with children	Percentage of households with a tumble drier
One adult, one child	46
One adult, two or more children	61
One man and one woman, one child	73
One man and one woman, two or more children	76
All other households with children	62

Source: Office for National Statistics, Table 9.4, Percentage of households with durable goods by income group & household composition based on weighted data and including children's expenditure 2002-03

Table 2.11 UK Drier Stocks 2006

Type	Model	Stock 2006
Condenser	A+ rated	-
	A rated	-
	B rated	-
	C rated	2 202 156
	D rated	543 447
	E rated	-
	F rated	-
	Other	-
	Total	2 745 605
Vented	A+ rated	-
	A rated	58 763
	B rated	-
	C rated	2 295 130
	D rated	2 912 330
	E rated	654 654
	F rated	-
	Other	-
	Total	5 920 878
Vented compact	A+ rated	-
	A rated	-
	B rated	-
	C rated	-
	D rated	236 685
	E rated	-
	F rated	337 092
	Other	136 841
	Total	710 618
	Grand Total	9 377 101

Source: (MTP, 2007)

Drier Water and Energy Consumption

Table 2.12 and Table 2.13 show the consumption of electricity for tumble driers and washer/driers per load, according to energy class, in 2006. Table 2.14 shows the water consumption of washer/driers for the drying cycle. Washer/driers consume water to aid the condensing process when drying. UK stock average consumption figures were calculated from these data.

Table 2.12 Tumble Drier Energy Consumption per Load by Energy Class

Energy Class	A	B	C	D	E	F	G
	kWh	kWh	kWh	kWh	kWh	kWh	kWh
Vented	1.71	1.98	2.24	2.51	2.78	3.05	3.35
Condenser	1.84	2.14	2.45	2.75	3.05	3.35	3.69

Source: (MTP, 2007a)

Table 2.13 Washer/Drier Energy Consumption for Drying per Load by Energy Class

Energy class	A+	A	B	C	D	E	F	G
	kWh	kWh	kWh	kWh	kWh	kWh	kWh	kWh
Drying	-	2.18	2.92	3.52	4.12	4.72	5.32	5.88

Source: (MTP, 2007a)

Table 2.14 Washer/Drier Water Consumption for Drying per Load by Energy Class

Energy class	A+	A	B	C	D	E	F	G
	litres	litres	litres	litres	litres	litres	litres	litres
Drying	-	-	29	65	79	-	-	-

Source: (MTP, 2007a)

Drier Load

Based on data from MTP (2007b), ERM estimated the stock average drier capacity to be 3.5kg. This data reference was used to determine the average energy consumption for drying 1kg of nappy.

Frequency of Drying

The total number of washing machines in the UK is 21 341 485 and 3 981 075 washer/driers. The total number of washing cycles per year per machine is predicted to be 274 by MTP. Additionally, the total number of tumble driers in the UK is 9 377 101. The total number of drying cycles per year per machine is predicted by MTP to be 148 for tumble driers and 97 for washer/driers.

Based on these data, ERM estimated that, on average, 26.6% of all washing cycles are followed by a drying cycle.

The use of tumble driers is dictated by ownership, convenience and the availability of other drying methods. Other drying methods include radiators, line drying indoors and line drying out of doors. Indoor drying consumes energy for part of the year as a result of an increased demand on central heating systems that are generally thermostatically controlled, whilst outdoor drying uses solar energy (wind and temperature). Outdoor line drying relies on climatic conditions. In the UK, precipitation is expected between 150 and 200 days per year (*Met Office UK Summary*).

3.1 DISPOSABLE NAPPY NUMBER, WEIGHT AND MANUFACTURE

Updated manufacturing, nappy composition and nappy weight data were obtained from AHPMA members. From the previous study, the number of nappies used over the average two and a half year period that a child is in nappies is 3796.

Table 3.1 Average UK Disposable Nappy Composition and Weight (2006)

	Total	Fluff pulp	SAP	PP	LDPE	Adhesives	PET/polyester	Other
Units	g	%	%	%	%	%	%	%
Average unit weight	38.6	34.1	32.4	16.6	6.0	3.8	2.2	4.8

3.2 WASTE MANAGEMENT

Based on data from Defra on waste management routes in 2005/06, ERM assumed 86% landfill and 14% energy from waste for residual waste management.

3.2.1 Excreta

In the previous study, it was assumed that 365kg of excreta was disposed with nappies as municipal solid waste. A small survey and analysis of bins by WRAP estimated the weight of excreta as 727kg. ERM modelled the WRAP estimate in a sensitivity analysis. The composition of excreta was assumed to be the same, 18% faeces and 82% urine.

3.2.2 Modelling of Waste Management

Regarding landfill and energy from waste, the recent peer-reviewed software tool *WRATE* (<http://www.environment-agency.gov.uk>) was used to model waste management activities. The research and documentation associated with *WRATE* suggests gas generation is complete within 100 years, and leachate release to groundwater is approaching levels of contaminant detection within 20 000 years. *WRATE* assumes that the emissions of gas and leachate over these time periods are instantaneous, ie they are allocated, with no discounting for time, to the material as it is landfilled.

WRATE takes into account all the stages in the management and processing of waste, from the point where it is discarded to the controlled disposal or recovery of the waste.

The tool also takes into account operational inputs and outputs of the waste management facilities according to the municipal solid waste fractions handled. It calculates avoided burdens due to materials and energy displacement.

The upstream limit of the system is the production of municipal solid waste. The model does not account for the energy and material costs of producing the products that make up the waste. The model covers municipal solid waste, which is comprised of household collected waste and the main civic amenity/bring system wastes.

The tool takes account of waste collection and processing stages and their associated sub stages.

To model the 100% anaerobic digestion sensitivity scenario, the *MBT - Hydro-Mechanical Separation and Anaerobic Digestion (with energy recovery)* technology in WRATE was manipulated by ERM to accept and to process disposable nappies.

Table 3.2 *Disposable Nappy Composition*

Scenario	Urine	Faeces	Plastics	Pulp	Miscellaneous
	Kg	Kg	kg	kg	kg
Original	299	66	84	50	13
WRAP Estimate*	596	131	84	50	13

**The same urine to faeces split is assumed*

The results presented reflect the assumptions made and the scenarios assessed, and should be read in this context.

4.1 SHAPED NAPPIES

Table 4.1 and Table 4.2 summarise a selection of the life cycle inventory environmental consumptions and flows for the manufacture and use of shaped nappies for each scenario.

Table 4.1 Electricity and Water Consumption

		Electricity consumption		Water consumption		
		Washing kWh	Drying kWh	Washing l	Flushing l	Drying L
1	Baseline	402.1	141.0	36 126	12 853	1576
2	High energy efficiency	389.7	80.6	27 869	12 853	1576
3	High load efficiency	268.1	141.0	25 216	12 853	1576
4	High temp	686.6	141.0	36 126	12 853	1576
5	100% tumble drying	402.1	529.9	36 126	12 853	5923
6	100% line drying	402.1	0.0	36 126	12 853	0
7	100% use on second child	402.1	141.0	36 126	12 853	1576
8	Reuse, high load efficiency and 100% line-drying	268.1	0.0	25 216	12 853	0

These results indicate that the *high temperature* and *100% tumble drying* scenarios, overall, have the largest inventory flows. This is due primarily to increased electricity consumption for washing or drying in consumer use. The extreme sensitivity scenario (*100% reuse, high load efficiency and 100% line drying*) generates the lowest profile in terms of inventory flows. With the exception of the baseline, which reflects what could be expected of the population as a whole, the scenarios reflect the differences that could be achieved by an individual's actions. Some, such as 100% line drying outside are unlikely or even impossible.

Table 4.3 and Table 4.4 show the whole life impact profile for each of the shaped nappy scenarios. A similar pattern to the inventory results is followed. The main driver for the impacts is the electricity consumption in washing and drying the nappies. The *high temperature* and *100% tumble drying* scenarios show the least beneficial environmental profile across the impact category indicators, compared to the baseline. The global warming potential has increased by 31% for the *high temperature* scenario and by 43% for *100% tumble drying* scenario.

The most beneficial scenarios, in terms of reduced global warming potential, relate to the *full load* and *100% line drying* scenarios, which show a decrease in global warming potential of 16%. If an A+ rated washer and an A-rated drier are used, as shown by the *high efficiency* scenario, then the global warming potential is reduced by 9%, compared to the baseline.

If we consider the global warming impact potential for the baseline scenario, 569kg CO₂ equivalents per child over two and a half years, this would equate to an estimated total global warming potential of approximately 0.4mt CO₂ equivalents per year (based on 1.7 million children in nappies at any one time). The impact profile calculated is similar to that calculated in the previous nappies study (559kg) ⁽¹⁾. However, care should be taken when comparing the numbers, as it has not been possible to determine average use across the population, and there are significant differences in the nappy systems assessed and the assumptions made this time.

This estimate can be considered in the context of total greenhouse gas emissions for the UK of approximately 700mt of CO₂ equivalents per year.

Based on the scenarios assessed, individual users of shaped nappies have the potential to improve the impact profile of nappy use per child by some 200kg over the two and a half years. Similarly, if users tumble dry every load, wash at 90°C and adopt other similar behaviours the impact could increase by between 175kg and 425kg of additional CO₂ equivalents.

The water use related to shaped nappies over the two and a half year period amounts to 41 m³ of irrigation water for cotton growing, 53 cubic metres of direct water demand and a total water requirement, including water used indirectly as a result of using shaped nappies, eg due to production of detergents and water used in the generation of electricity, of 1221 cubic metres. If all children in nappies were to use shaped nappies, this would equate to approximately 40 million cubic metres of direct water demand per year. Putting this in the context of total water usage: in 1997/98 3.2 billion cubic metres of water, was used by households through the public water supply network⁽²⁾, so if all children used reusable nappies this would add one percent to direct household water consumption.

(1) Life Cycle Assessment of Disposable and Reusable Nappies in the UK, Environment Agency, ISBN: 1-84-432427-3

(2) Environmental Accounts Autumn 2004, Office for National Statistics

Table 4.2 Inventory Analysis for Each Shaped Nappy Scenario (Manufacture and Use Excluding Disposal)

Inventory Flow	Coal (hard)	Oil	Natural gas	Carbon dioxide (fossil)	Methane	SO _x	NO _x	N ₂ O	Total water*	Water (direct)	Water Cotton Irrigation
Scenario	kg	kg	m ³	kg	kg	kg	kg	kg	m ³	m ³	m
1 - Baseline	156	28	76	515	1.7	1.1	1.0	0.03	1221	53	41
2 - High efficiency	139	27	69	469	1.6	1.1	1.0	0.03	1136	42	41
3 - High load efficiency	127	25	65	431	1.4	1.0	0.9	0.03	1277	40	55
4 - High temperature	216	29	100	678	2.1	1.3	1.2	0.04	1482	51	41
5 - 100% tumble dry	239	30	109	740	2.4	1.3	1.2	0.04	1588	55	41
6 - 100% Line dry	126	27	64	432	1.4	1.1	0.9	0.03	1082	49	41
7 - 100% re-use on 2 nd child	148	26	70	484	1.6	1.0	0.9	0.03	913	51	21
<i>Combined sensitivity</i>											
8 - Combined (re-use, load, line dry)- environmentally aware scenario	87	22	45	308	1.0	0.8	0.7	0.02	735	38	27
9 - Combined (high temp,100% tumble dry) - high energy scenario	299	31	133	904	2.8	1.4	1.4	0.05	1854	55	41

*includes hydro power requirements and power station cooling

Table 4.3 Impact Profile for Each Shaped Nappy Scenario (Whole Life - Includes Disposal)

Impact category	Abiotic depletion	Acidification	Eutrophication	Fresh water aquatic ecotoxicity	Global warming potential	Human toxicity	Photochemical oxidation
	kg Sb eq	kg SO ₂ eq	kg PO ₃ ⁻ eq	kg 1,4-DB eq	kg CO ₂ eq	kg 1,4-DB eq	kg C ₂ H ₄
1 - Baseline	4.2	1.9	0.3	4.3	568.9	73.3	0.1
2 - High efficiency	3.8	1.9	0.3	4.0	519.7	68.4	0.1
3 - High load efficiency	3.5	1.7	0.3	3.5	475.4	62.1	0.1
4 - High temperature	5.5	2.1	0.4	5.6	745.7	90.8	0.1
5 - 100% tumble dry	6.0	2.2	0.4	6.1	815.1	97.5	0.1
6 - 100% Line dry	3.5	1.8	0.3	3.6	478.3	64.4	0.1
7 - 100% re-use on 2 nd child	3.9	1.7	0.3	4.1	535.4	70.3	0.1
<i>Combined sensitivity</i>							
8 - Combined (re-use, load, line dry)	2.5	1.3	0.2	2.6	342.3	49.5	0.1
9 - Combined (high temp,100% tumble dry)	7.3	2.4	0.4	7.5	992.8	115.0	0.1

Note: The human and aquatic toxicity impact methods should be treated with caution due to the limitations associated with the methods.

Table 4.4 Impact Change (%) for Each Shaped Nappy Scenario Compared with Baseline

Impact category	Abiotic depletion	Acidification	Eutrophication	Fresh water aquatic ecotoxicity	Global warming potential	Human toxicity	Photochemical oxidation
	<i>kg Sb eq</i>	<i>kg SO₂ eq</i>	<i>kg PO₃⁻ eq</i>	<i>kg 1,4-DB eq</i>	<i>kg CO₂ eq</i>	<i>kg 1,4-DB eq</i>	<i>kg C₂H₄</i>
<i>1 - Baseline</i>	4.2	1.9	0.3	4.3	568.9	73.3	0.1
2 - High efficiency	-9%	-3%	-2%	-8%	-9%	-7%	-3%
3 - High load efficiency	-16%	-11%	-13%	-19%	-16%	-15%	-9%
4 - High temperature	31%	11%	7%	31%	31%	24%	10%
5 - 100% tumble dry	43%	16%	14%	42%	43%	33%	15%
6 - 100% Line dry	-16%	-6%	-5%	-16%	-16%	-12%	-5%
7 - 100% re-use on 2 nd child	-6%	-10%	-9%	-5%	-6%	-4%	-6%
<i>Combined sensitivity</i>							
8 - Combined (<i>re-use, load, line dry</i>)	-40%	-30%	-30%	-41%	-40%	-33%	-23%
9 - Combined (<i>high temp, 100% tumble dry</i>)	74%	27%	21%	73%	75%	57%	25%

Note: ***bold and italic*** indicates where impacts have increased compared to baseline.

Note: ***The human and aquatic toxicity impact methods should be treated with caution due to the limitations associated with the methods.***

CONFIDENTIAL DRAFT

To place the scale of baseline shaped nappy scenario impact contributions in a more manageable context, *Table 4.6* compares the impacts with the average impact profile of an average European person, this step is referred to as normalisation. As can be seen the contribution

Table 4.5 *Normalised Baseline Results (Europe 1995 (EU15+NO&CH))*

Impact category	Unit	Shaped Nappy Baseline
Abiotic depletion	person year equivalents	0.043
Acidification	person year equivalents	0.011
Eutrophication	person year equivalents	0.004
Fresh water aquatic ecotoxicity	person year equivalents	0.001
Global warming potential	person year equivalents	0.018
Human toxicity	person year equivalents	0.001
Photochemical oxidation	person year equivalents	0.002

4.2 DISPOSABLE NAPPIES

Table 4.7 summarises a selection of the life cycle inventory flows for the manufacture and use of disposable nappies for the baseline scenarios examined in the sensitivity analysis. These results compare the baseline with the 10% *lightweighting* sensitivity scenario. Unlike nappy care changes which can be made by users of reusable nappies, *lightweighting* is not a change that can be achieved immediately and the results should be considered in this context. For all inventory flows, the results directly relate to the reduction in manufacturing material inputs, where a 10% reduction in weight gives a comparable reduction in the inventory flow.

Table 4.8 and *Table 4.9* show the whole life impact profile for the disposable nappy baseline and scenarios considered in the sensitivity analysis. As with the inventory results, all impact category indicators reduce for the 10% *lightweighting* sensitivity scenario, compared to the baseline. The main driver for the impacts is the production of the materials used to construct the disposable nappies. Across all impact categories, should the manufacturers deliver continued *lightweighting* there is a beneficial reduction in impacts, which ranges from 5% to 9%. For global warming potential the 10% *lightweighting* sensitivity scenario shows a 8% reduction in impact.

The sensitivity analysis scenarios considering additional excreta from the WRAP excreta estimate sensitivity scenario results in a 3% increase in the global warming impact category. The greatest influence this scenario has is on the water pollution impact categories.

The anaerobic digestion sensitivity analysis scenario shows that diversion of disposable nappies away from current residual waste management routes can benefit greenhouse gas profiles through digestion and energy recovery from the biogas produced.

If we consider the global warming impact potential for the baseline scenario, 551kg CO₂ equivalents per child over the two and a half year period, this would equate to an estimated total global warming potential of approximately 0.4mt CO₂ equivalents per year. This assumes that all children wear disposables (based on 1.7 million children in nappies at any one time).

This estimate can be considered in the context of total greenhouse gas emissions for UK of approximately 700mt of CO₂ equivalents.

Between 2001/02 and 2006 the disposable nappy industry has reduced the weight of the average disposable nappy by some 11 per cent. This has reduced the global warming impact resulting from nappy use across all children by around 10 per cent.

To place the scale of baseline disposable impact contributions in a more manageable context, *Table 4.6* compares the impacts with the average impact profile of an average European person, this step is referred to as normalisation.

Table 4.6 *Normalised Baseline Results (Europe 1995 (EU15+NO&CH))*

Impact category	Unit	Disposable Nappy Baseline
Abiotic depletion	person year equivalents	0.048
Acidification	person year equivalents	0.018
Eutrophication	person year equivalents	0.004
Fresh water aquatic ecotoxicity	person year equivalents	0.000
Global warming potential	person year equivalents	0.016
Human toxicity	person year equivalents	0.001
Photochemical oxidation	person year equivalents	0.003

Table 4.7 Inventory Analysis for Baseline Disposable and Lightweighting Sensitivity Scenario (Manufacture and Use Excluding Disposal)

Inventory Flow	Coal (hard)	Oil	Natural gas	Carbon dioxide (fossil)	Methane	SO _x	NO _x	N ₂ O	Total water*	Water (direct)
	kg	kg	m ³	kg	kg	kg	kg	kg	m ³	m ³
0 – baseline	43	107	86	474	1.1	1.8	2.2	0.02	141	0.048
<i>Sensitivity</i>										
00 - 10% Lightweighting	39	98	77	436	1.0	1.6	2.0	0.02	130	0.043

*includes hydro power requirements and power station cooling

Table 4.8 Impact for Disposable Nappy Baseline and Sensitivity Scenarios (Whole Life – Includes Disposal)

Impact category	Abiotic depletion	Acidification	Eutrophication	Fresh water aquatic ecotoxicity	Global warming potential	Human toxicity	Photochemical oxidation
	kg Sb eq	kg SO ₂ eq	kg PO ₄ ⁻ eq	kg 1,4-DB eq	kg CO ₂ eq	kg 1,4-DB eq	kg C ₂ H ₄
0 – baseline	4.5	3.4	0.40	1.9	551	58	0.20
<i>Sensitivity</i>							
00 - 10% lightweighting	4.1	3.1	0.37	1.9	509	56	0.19
000 – with WRAP excreta estimate	4.4	3.4	0.46	2.5	570	61	0.21
0000 – with 100% anaerobic digestion	4.4	3.3	0.39	2.8	512	68	0.20

Note: The human and aquatic toxicity impact methods should be treated with caution due to the limitations associated with the methods.

Table 4.9 Impact for Disposable Nappy Baseline and Sensitivity Scenarios (Whole Life – Includes Disposal)

Impact category	Abiotic depletion	Acidification	Eutrophication	Fresh water aquatic ecotoxicity	Global warming potential	Human toxicity	Photochemical oxidation
	kg Sb eq	kg SO ₂ eq	kg PO ₃ ⁻ eq	kg 1,4-DB eq	kg CO ₂ eq	kg 1,4-DB eq	kg C ₂ H ₄
0 – baseline	4.5	3.4	0.40	1.9	551	58	0.20
<i>Sensitivity</i>							
00 - 10% lightweighting	-9%	-9%	-7%	-5%	-8%	-5%	-5%
000 – with WRAP excreta estimate	-1%	2%	14%	26%	3%	4%	3%
0000 – with 100% anaerobic digestion	-1%	-2%	-2%	46%	-7%	16%	-1%

Note: The human and aquatic toxicity impact methods should be treated with caution due to the limitations associated with the methods.

The study has estimated, using a 2006 reference point, the impact contribution profiles for a child using disposable nappies for the first 2.5 years of its life and a child using shaped cloth nappies for the same period.

The study demonstrates the environmental effects of:

- disposable nappy design and manufacturing;
- disposable nappy disposal choices; and
- laundry choices for shaped nappy use.

The average 2006 disposable nappy would result in a global warming impact of approximately 550kg CO₂ equivalent if used over the 2.5 years a child is typically in nappies. The global warming impact from disposable nappies use has decreased since the earlier study due to changes in production operations and an 11% reduction in the weight of nappies.

The report highlights that the manufacture of disposable nappies has greater environmental impact in the UK than their waste management by landfill.

For reusable nappies, the baseline scenario based on average washer and drier use produced a global warming impact of approximately 570kg CO₂ equivalent.

However, the study showed that the impacts for reusable nappies are highly subject to the way they are laundered.

Washing the nappies in fuller loads or line-drying them outdoors all the time (ie ignoring UK climatic conditions for the purposes of illustration) was found to reduce this figure by 16 per cent. Combining three of the beneficial scenarios (washing nappies in a fuller load, out door line drying them all of the time, and using them on a second child) would lower the global warming impact by 40 per cent from the baseline scenario, or some 200kg CO₂ equivalent over the two and a half years, this is equivalent to the emissions associated with 0.016 person years .

In contrast, the study indicated that if a consumer tumble dried all their reusable nappies it would produce a global warming impact 43 per cent higher than the baseline scenario. Similarly, washing nappies at 90°C instead of at 60°C would produce 31 per cent more CO₂ equivalent than the baseline. Combining these two energy intensive scenarios would increase the global warming impact by 75 per cent over the baseline scenario, or some 420 kg CO₂ equivalent over the two and a half years, this is equivalent to the emissions associated with 0.033 average person years.

The environmental impacts of using shaped reusable nappies can be higher or lower than using disposables, depending on how they are laundered..

Cloth nappy users will reduce their impacts by :

- line drying outside whenever possible;
- tumble drying as little as possible;
- when replacing appliances if possible choose more energy efficient appliances (A+ rated machines are preferred)
- not washing above 60°C
- washing fuller loads; and
- re-using nappies on other children.

CONFIDENTIAL DRAFT