MOSAIC/E

THIS REPORT CONTAINS CLASSIFIED ATOMIC ENERGY DATA AND MAY ONLY BE SHOWN TO STAFF WHO ARE SPECIALLY AUTHORISED TO HAVE ACCESS TO THIS INFORMATION.

UK UNCLASSIFIED

# OPERATION MOSAIC

JOINT OPERATIONAL PLAN (M. J. O. P.)

SECTION E - RADIOLOGICAL SAFETY REGULATIONS

CONFIDENTIAL

THIS DOCUMENT IS THE PROPERTY OF U.K. ATOMIC ENERGY AUTHORITY, and is issued for the information of officers and responsible officials.

The officer or official in possession of the document will be responsible for its safe custody and that its contents are not disclosed to any unauthorised person.

The document will be kept under lock and key when not in actual use.

Trials Planning Branch, A.W.R.E., Aldermaston. Berkshire.

January, 1956.

This report contains classified Atomic Energy data and may only be shown to staff who are specially authorised to have access to this information.

# OPERATION MOSAIC

JOINT OPERATIONAL PLAN (M.J.O.P.)

Section E - Radiological Safety Regulations

Received 17th January, 1956.

-1-

CONTIDENTAL/CUADO


# RECORD OF AMENDMENTS

No.	Amended by	Date
1		
2		
3		
4		
5		
6		
7		
8		
9		
10	·	
11		_
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		

#### CONFIDENCE ALL CHARD

# INITIAL DISTRIBUTION

# Internal

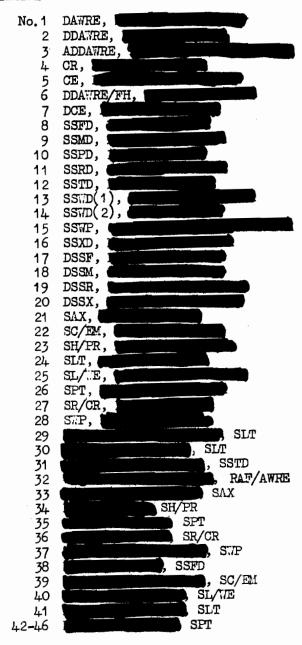

-3-

# CONTIDENTIAL/CUART

# INITIAL DISTRIBUTION

# External

No.47	Director of Atomic Weapons.
	(Trials)
48	Ministry of Defence
49-51	Secretary of the Admiralty (personal for Head of Military Branch)
	for: Deputy Chief of Naval Staff (1)
	Assistant Chief of Naval Staff (Warfare) (1)
	Director Tactical and Staff Duties Division (1)
52 <b>-</b> 67	Military Branch (Forcign Mails), Admiralty
	for: Commodore, Special Squadron, H.M.S. NARVIK (6)
•	Commander-in-Chief, East Indies Station (2)
	Commander-in-Chief, Far East Station (8)
	(H.M.S. ALERT 2 copies, other ships 1 copy each)
68	Officer Commanding, Independent Troop 25 Field Engineers
69 <b>-8</b> 0	Staff Officer to Assistant Chief of Air Staff (Operations)
	ror: Private Secretary to Secretary of State for Air (1)
	Private Secretary to Chief of Air Staff (1)
	Private Secretary to Vice Chief of Air Staff (1)
	Private Secretary to Deputy Chief of Air Staff (1)
	Staff Officer to Assistant Chief of Air Staff
	(Intelligence) (1)
	Assistant Under Secretary of State (Air Staff) (1)
	Assistant Under Secretary of State (Orginisation) (1)
	Director of Hygiene and Research (1)
	Head of F6 (1)
	D.D.Ops (AWT) (3)

# CONTIDENTIAL CHARD

# INITIAL DISTRIBUTION

### Overseas

No. 81-101

Weapons (Trials) for Australian Commonwealth Navy
Board (
for: C.O.'s of ships and N.O.I.C.'s concerned (12)

Secretary, Monte Bello Working Party (1)

Head of U.K.M.O.S.S. (A) (1)

U.K.S.L.S., Victoria Baracks, Melbourne (6)

(3 copies marked for Department of Air, 1 copy
marked for attention

Director, Australian Meteorological Bureau (1)

This plan should be returned to Chief Information Officer, AURE, Aldermaston, Berkshire, when the recipient has no further use for it.

GOLDSTON WITH TAR COLLADS	
OCTIVE TRANSPORT OF STREET	

# MOSAIC/E

# TABLE OF CONTENTS

		Page			
1.	Introduction	5			
2.	Maximum Permissible Levels	5			
3.	Classification of Areas	9			
4.	Film Badges	10			
5.	Protective Clothing	10			
6.	Use and Storage of Radioactive Material	11			
7.	Transit of Radioactive Material	11			
8.	Laboratory Waste	12			
9.	Monitoring	12			
10.	Medical Surveillance	14			
11.	Accidents and First Aid				
12.	Storage and Usc of Personal Effects				
13.	Hazards External to the Monte Bello Area				
14.	Responsibilities	15			
<b>1</b> 5.	Short Title and Abbreviation	16			
	Appendices	17			
	Appendix 1. Maximum Permissible Concentrations	17			
	Appendix 2. Method of Making Smear Tests	20			
	Appendix 3. Removal of Radioactive Contamination from Hands	21			
	Appendix 4. Carriage of Radioactive Material	23			
	Appendix 5 Bibliography	32			

#### 1. Introduction

- 1.1 Radiation which may be encountered during the Operation may be  $\alpha$  particles,  $\beta$  particles,  $\gamma$  rays and neutrons. Under properly controlled conditions work involving exposure to these radiations can be carried on in perfect safety. Excessive exposure however may result in serious damage to the human body. The danger is particularly insidious because the effects are not immediately felt and damage may only become apparent after a period of years. Damage may arise not only from external exposure but from irradiation of internal organs as a result of ingestion, inhalation, injection into the bloodstream through cuts and abrasions, or even by absorption through an intact skin.
- 1.2 The object of these regulations is to ensure complete protection both of staff and of the general public, whilst imposing the minimum interference with work. To this end, the regulations will, at all times, apply to all who are concerned with the Operation, whether stationed in the Monte Bello Area, or at ONSLOW, PEARCE Field, or elsewhere.
- 1.3 In order to assist in the implementation and interpretation of these and other Radiological Safety Regulations a Health Controller has been appointed, who is respansible to the Operational Commander through the Scientific Superintendent for all aspects of radiological safety (Section 4.4.2 of the MOSAIC/INT to the M.J.O.P. refers).

#### 2. Maximum Permissible Levels

- 2.1.1 The maximum permissible levels of the various radiations and radioactive substances are based on the Recommendations of the International Commission on Radiological Protection and of the International Commission on Radiological Units, and have been approved by the UKAEA and other Authorities concerned.
- 2.1.2 It is emphasized that these are maxima and every endeavour must be made to keep the average exposure as low as possible.

# 2.2 External Radiations

For external radiation the maximum permissible levels will be:-

# 2.2.1 $\beta$ and y Radiation

- (a) A normal working rate as defined in the current "Recommendations of the International Commission on Radiological Protection". This is at present (January, 1956):
- 1.5 Rep/week of which the y radiation component must not exceed 0.3 R/week.

The  $\beta$  dose to the eyes must not exceed 0.3 Rep/week.

(b) A lower integrated dose of up to 15 Rep of which the gamma radiation components must not exceed 3R.

This dose will be applied only with the express permission of the Health Controller, and will be given only where necessary for the smooth running of the operations.

Except as provided for under (c) or (d) below, personnel who have received this dose will not be subjected to further exposure until their average exposure from the start of the operation is below 1.5 Rep/week of which the gamma component shall not exceed 0.3 R/week.

(c) A higher integrated dose of up to 50 Rep of which the gamma radiation component must not exceed 10 R.

This dose will be applied only in cases of necessity in order to recover vital records or information which might otherwise be lost, and will require the personal permission of the Scientific Superintendent after consultation with the Health Controller and the Medical Officer.

Except as provided for under (d) below, personnel who have received this dose will not be subjected to further exposure until their average exposure from the start of the Operation is below 1.5 Rep/week, of which the gamma component shall not exceed 0.3 R/week.

(d) A special higher integrated dose of up to 75 Rep of which the gamma radiation component must not exceed 25 R.

This dose shall be applicable only in cases of extreme necessity and only to personnel who are not normally

exposed to radiation, and then only with the express personal permission of the Scientific Superintendent after consultation with the Health Controller and the Medical Officer.

Personnel who have received this dose will not be subjected to further exposure during a period of three years.

# 2.2.2 Neutron Radiation

The maximum permissible level will be as defined in the current recommendations of the "International Commission on Radiological Protection". This is at present (January, 1956):

The dose to the tissue 2 cm. below the skin surface must be less than 30 millirads/week. This figure is given by the neutron fluxes below for a 40 hour week.

Neutrons	of:	energy	0.025	ev	-	2000	neutrons/	cm.	/sec.
11	77	11	10	ev	-	2000	neutrons/	cm.2	/sec.
11	**	17	10	kev	-	1000	neutrons/	cm.	/sec.
"b	Ħ	Ħ	0.1	Mev	-	200	neutrons/	cm.	/sec.
**	11	11	0.5	Mev	-	80	neutrons/	cm.	/sec.
11	11	11	1	Mev	_	60	neutrons/	cm.	sec.
11	11	11	2	Mev	-	40	neutrons/	cm.	/sec.
"	17	11	3-10	Mev	-		neutrons/		

### 2.2.3 a Radiation

 $\alpha$  particles present no external hazard as they are unable to penetrate the outer layers of undamaged skin.

### 2.3 Internal Radiations

The maximum permissible levels of ingestion, inhalation and injection are based on the equivalent doses to tissue, but are dependent on biological factors which vary with the material.

# 2.3.1 The Maximum Permissible Levels Will Be:

(a) For Individual isotopes, or mixtures of isotopes except weapon debris.

The concentration shall be that listed in Appendix 1 for the material concerned.

# (b) For Weapon Debris

- (i) In water  $10^{-7}$   $\mu$ c./c.c.
- (ii) In Air (a) α emitters. The concentration shall be that listed in Appendix 1 for the most hazardous material likely to be found.
  - (b)  $\beta$ -y emitters. The concentration shall be that given by the expression

$$\frac{3.0 \times 10^{-6}}{T}$$
  $\mu$ c./c.c., where 0.25 < T < 5040

and T is the time after the explosion in hours. For times after 5040 hours (210 days) the value given for  $Sr^{90}$  shall be used, namely 6 x  $10^{-10}$   $\mu c./c.c.$ 

If the age of the debris is in doubt, the galue adopted must be that applicable to the greatest possible age.

The maximum permissible levels applicable to <u>inhalation</u> hazards are based on a regular exposure of 56 hours/week. If these hours are not applicable the levels should be altered in inverse proportion to the duration of exposure (see Appendix 1).

# 2.4 Contamination Levels

Contamination can be fixed or loose.

- 2.4.1 In the case of benches, clothing, etc., contamination can be regarded as <u>fixed</u> when a smear test (see Appendix 2) gives values below the maximum permissible levels. In the case of hands and body it is defined as that which remains after washings in accordance with the instructions laid down in Appendix 3.
- 2.4.2 The maximum permissible levels of  $\underline{\text{fixed}}$  surface contamination will be:

<u>a</u>	Microcuries/cm2
600 disintegrations/min on both sides of	1 × 10 <sup>-6</sup>
one hand 20 disintegrations/min/cm2 - clothing,	1 × 10 <sup>-5</sup>
bonches, equipment, etc. 400 disintegrations/min./cm2 - fume cupboard	ls 2 x 10 <sup>-4</sup>

<u>β-у</u>	Microcuries/cm.
6,000 disintegrations/min on both sides of	1 × 10 <sup>-5</sup>
one hand 400 disintegrations/min/cm² - clothing,	2 × 10 <sup>-4</sup>
benches, equipment, etc. 400 disintegrations/min/cm2 - fume cupbour	rds 2 × 10 <sup>-4</sup>

2.4.3 The maximum permissible levels for <u>loose</u> contamination will be:

<u>a</u>	Microcuries/cm2
5 disintegrations/min/"smear"	1.5 × 10 <sup>-8</sup>
<u>β-у</u> .	
20 disintegrations/min/smcar"	6 × 10 <sup>-8</sup>

# 3. Classification of Areas

- 3.1 All parts of the various ships, shore installations and sea or land areas concerned in the Operation will be classified according to the nature of the work which may be done in the particular part.
- 3.2 The system of classification and nomenclature which will be used is:

#### 3.2.1 Non-Active areas

A NON-ACTIVE area is one in which the maximum radiation levels must be less than 1/10 of those laid down in Section 3.2.2 for ACTIVE areas and there is no detectable loose activity. No special radiation precautions will be necessary.

### 3.2.2 Active areas

Those in which there may be some radiation risk and where precautions appropriate to the degree of risk must be taken. There will be three categories:

- (a) <u>BLUE area</u> Risk of penetrating radiation but not of inhalation, ingestion or injection. No special clothing.
- (b) RED area Risk of penetrating radiation and of slight inhalation, ingestion and injection. Protective clothing will be worn in accordance with Health Control recommendations for the particular area.

- (c) YELLOW area Risk of a serious inhalation, ingestion, injection or penetrating radiation hazard. Fully protective clothing must be worn.
- 3.2.3 The classification of an area will be laid down by the Health Controller who must be informed prior to any proposed change in the work which might affect the classification. The Health Controller will review the classifications periodically.
- 3.2.4 Signs showing the classification and having a patch of the appropriate colour will be displayed at all entrances to any ACTIVE area.

All areas not classified in this way will be NON-ACTIVE areas and these will not have any special marking.

3.3 No person will be allowed to enter RED or BLUE areas without permission of the Scientist, or other Officer, in charge of the area concerned. No person will be allowed to enter a YELLOW area without permission of the Health Control Officer in charge.

When it is necessary to carry out any building, engineering or other maintenance work in any ACTIVE area, a Permit to Work Certificate must first be raised through the Trials H.Q., who will consult the Health Controller where necessary.

#### 4. Film Badges

All personnel will wear a Personal Monitoring Film at all times.

#### 5. Protective Clothing

- 5.1.1 All radiation protective clothing will be white, and will be distinguished by red epaulettes or a red triangle as appropriate.
- 5.1.2 The wearing of the approved protective clothing with film badges and dosimeters as specified in the appropriate parts of the Regulations is compulsory.
- 5.1.3 To assist the rigid enforcement of those rules under no circumstances will radiation protective clothing be issued for other purposes.

# 5.2 Degree of Pretection

### 5.2.1 Workers in BLUE Areas

No special protective clothing necessary.

# 5.2.2 Workers in RED Areas

Approved laboratory coats or overalls, shoes or overshoes. The above is general for all RED Areas but in certain special cases additional clothing will be specified by the Health Controller. When worn in ACTIVE areas laboratory coats and everalls must be kept fastened at all times.

# 5.2.3 Workers in YELLOW Areas

Complete change of all clothing in the fully protective items provided.

# 5.3 Laundering and Disposal

Protective clothing which becomes contaminated will be stored in active waste bins, to be despatched to Maralinga for laundering after the Operation.

# 6. Use and Storage of Radioactive Materials

- 6.1 No radioactive material will be used in NON-ACTIVE areas. Scaled sources may be used in carrying out calibrations provided the Health Controller has been informed and BLUE area warning signs have been erected.
- 6.2 Materials which are completely sealed so as to prevent any escape of active materials may be used, or stored, in any ACTIVE area. Adequate precautions must be taken to ensure that the dose received by workers in that area is within the limits laid down and to prevent the dose rate at any point outside the ACTIVE area from exceeding one tenth of the maximum permissible.
  - 6.3.1 Use or storage of radioactive materials other than as stated above is permitted only in RED or YELLOW areas.
  - 6.3.2 In RED areas no radioactive material will be exposed unnecessarily to the air of the laboratory.
- 6.4 Details of special precautions required for particular materials and areas will be laid down as appropriate by the Health Controller.

# 7. Transit of Radioactive Materials

7.1 Transit of radioactive materials through internal NON-ACTIVE areas is permitted, provided they are in properly designed and scaled containers which will effectively prevent escape of the material and which are themselves externally clean, and that the Health Controller has been informed. The transit should be uninterrupted and adequate percautions must be taken to ensure that the y-ray dose does not exceed 200 milliroentgens/hour at the surface, nor 10 milliroentgens/hour at one metre, and the neutron dose rate

does not exceed 30 neutrons/cm²/sec. at the surface. Transit of containers where the dose rate exceeds any one of these limits will be permitted only with <u>prior</u> approval of the Health Controller.

7.2 Transit of radioactive materials to and from the Monte Bello Area and the various ships and stations elsewhere is governed by any International, U.K. and Australian Government Regulations currently in force, by the Regulations of any other Government or Organisation concerned, and by any Instructions, currently in force, issued by SH/PR, AWRE, or the Health Controller (see Appendix 4). Each of the carrying organisations has its own regulations to which the consignee must also conform.

# 8. Laboratory Waste

- 8.1 All solid waste will be segregated into the following four categories.
- (i) Highly active waste, i.e. above one millicuric.
- (ii) Low activity waste non-combustible.
- (iii) Low activity waste combustible.
- (iv) Used paper towels.

Cateogry (i) waste must be sealed in rigid containers and held safely by the originator until proper arrangements have been made for its disposal.

Bins suitably labelled will be kept in all lab ratories and workrooms where categories (ii), (iii) and (iv) are likely to arise. Low activity articles too large to be placed in the bins will be wrapped in impervious material in such a way as to prevent the escape of active material, and will have their contents and approximate levels of activity marked on the outside.

#### 9. Monitoring

9.1 The object of radiation monitoring is to ensure the protection of workers and to prevent interference with scientific work due to contamination.

The Radiological Group will provide complete monitoring facilities for personal use.

A delegate of the Health Controller will be available to all ACTIVE buildings and areas to advise and assist where called upon.

#### 9.2 Personal Monitoring

- 9.2.1 Personal monitoring must primarily be the individual's responsibility.
- 9.2.2 Gamma ray dosage will be measured by means of film badges which will be worn by all persons at all times.
- 9.2.3 All persons, before leaving an ACTIVE area will monitor themselves by means of the instruments provided, to ensure that the contamination levels laid down are not exceeded.
- 9.2.4 For special operations, where high dose rates are anticipated personal ionization chambers will be worn. Special film badges will be worn when required by the Health Controller or his representatives.

# 9.3 Area Monitoring

- 9.3.1 Air sampling will be carried out in all laboratories and work rooms where there is normally a potential inhalation risk. For special operations or where an unusual inhalation risk is anticipated additional samples will be taken.
- 9.3.2 Neutron and gamma ray levels will be measured by fixed instruments installed where necessary.
- 9.3.3 The Scientist, or other Officer, in charge will have regular contamination checks, carried out to ensure that levels of activity are below the maximum values laid down.

In addition periodic surveys will be made by R.L. Group surveyors.

#### 9.4 Monitoring of Active Waste

Solid waste containers will be monitored and decontaminated if necessary before being taken from an ACTIVE Area.

#### 9.5 Monitoring of Equipment

All equipment will be monitored and decontaminated if necessary before being taken out of an ACTIVE Area.

Equipment will not be moved into a less active area unless it is monitored, decontaminated if necessary, and given a R.L. Group clearance certificate. Articles must not be moved into a BLUE or a NON-ACTIVE area if there is any detectable loose activity.

# 10. Medical Surveillance

- 10.1 The Medical Officer must be consulted in all medical aspects of radiological safety.
- 10.2 No person will be allowed to work in an ACTIVE area, or with radioactive materials, who has not previously been cleared for such work by a special medical examination either immediately prior to the Operation concerned, or immediately prior to his first exposure during the Operation

# 11. Accidents and First Aid

- 11.1 If anyone thinks he may have inhaled, ingested or otherwise absorbed (e.g. through cuts etc.) any radioactive material he must at once:
  - 11.1.1 Take amergency action.
  - 11.1.2 Report to the Health Control Officer or the Medical Officer (through his Officer-in-Charge if the accident occurs on duty).
- 11.2 If the skin is accidentally cut, or scratched, during work in ACTIVE areas the cut should be placed, if possible, under running water within 15 seconds and held there whilst the whole wound area is scrubbed with a scaped brush for at least five minutes. The flow of blood should be encouraged by mild pressure above the wound. The surrounding skin should be monitored and washing continued until this is inactive.
  - 11.2.2 A sterile dressing, not a strip of dressing of the Elastoplast type, may be used as a temporary cover until qualified medical attention has been received.
  - 11.2.3 The object causing the wound will be kept and tested for contamination.
  - 11.3.1 If anyone spills any radioactive material he must, unless in a YELLOW area:
    - (i) Ask all staff to vacate the area.
    - (ii) Limit the spread of contamination.
    - (iii) Report immediately to R.L. Group
  - 11.3.2 In a YELLOW area he must mark the boundaries of the spill and report to R.L. Group.

# 12. Storage and Use of Personal Effects

Eating, smoking, drinking and the storing of food, drink and tobacco

anywhere in ACTIVE areas, other than BLUE areas is forbidden.

# 13. Hazards External to the Monte Bello Area

- 13.1 There will be certain radioactive hazards external to the Monte Bello Area associated with explosion clouds or fall-out from the clouds. The Health Controller will obtain from the Theoretical Predictions Group and the Staff Meteorological Officer all data required to maintain a record of the tracks of such clouds and of the surface fall-out pattern to the extent necessary to ensure that no hazard exists to personnel or animals.
- 13.2 All aircraft, vessels and vehicles operated in connection with the Operation will be governed by such instructions as may be issued by the Health Controller with regard to radiological safety. Where aircraft, vessels, vehicles or personnel have been in, or are likely to go into, areas which may have been contaminated, all personnel concerned must report at once to R.L. Group, who will arrange to check, have decontaminated if necessary, grant clearances and will give such other instructions as may be necessary.
- 13.3 Advice on other matters concerning Radiological Safety outside the Range will be called for from the Health Controller as necessary.

# 14. Responsibilities

# 14.1 The Individual

Any person coming into contact with radioactive materials or entering active areas is personally responsible for complying with these Regulations and any Instructions issued by the Health Controller.

# 14.2 The Officer in Charge of Any Task is Responsible for Ensuring:

- 14.2.1 That these Regulations and any Instructions issued by the Health Controller together with any additional requirements applicable to his task are brought to the notice of all his staff and visitors and that they clearly understand the hazards involved in any work that they have to do.
- 14.2.2 That these Regulations and any Instructions issued by the Health Controller are rigorously adhered to.
- 14.2.3 That the Health Controller and the Medical Officer are informed in advance of any proposed work which may affect the Radiological Safety arrangements in any way.
- 14.2.4 That any accidents or abnormal circumstances are reported immediately to the Scientific Superintendent, the Health Controller, the Medical Officer and, where applicable, to the Commanding Officers of the service units involved.

# 14.3 The Health Controller is Responsible for:

- 14.3.1 Radiological control of all movements into, out of or within YELLOW areas, and radiological supervision in all ACTIVE areas.
- 14.3.2 Maintenance of records of individual exposures, and of the locations of ACTIVE areas.
- 14.3.3 Prompt investigation of all accidents and abnormal circumstances reported to him.
- 14.3.4 Advice on all aspects of radiation safety and issue on behalf of the Operational Commander of Special Instructions as required.

# 14.4 Officers Commanding Service Units, etc.

The Officers in Command of the various ships, aircraft, Service Units and Detachments or Groups engaged in the Operation whether in the Monte Bello Area or elsewhere will ensure that these Regulations and any Instructions of the Health Controller are brought to the notice of all personnel under their command and to their visitors, and will ensure that the Regulations and Instructions are enforced.

# 14.5 The Scientific Superintendent Will Ensure That:

These Regulations, together with any Instructions issued by the Health Controller under the authority of Section 14.3 above, are enforced and are brought to the notice of all staff concerned in the Operation and to the notice of all visitors.

#### 14.6 The Operational Commander Will Ensure That:

These Regulations, together with any Instructions issued by his Health Controller are enforced and are brought to the notice of all personnel, ships and other Service Units concerned in the Operation and to the notice of all visitors, whether in the Monte Bello Area or elsewhere.

14.7 Test explosions involving radioactive materials will be carried out only under Meteorological conditions, such that weapon debris falls within the permissible firing arcs laid down for the Trial or test concerned.

#### 15. Short Title and Abbreviation

- 15.1 The short title for these Regulations shall be the Mosaic Radiological Safety Regulations.
- 15.2 The authorised abbreviation for use in references shall be M.R.S.R./56.

# APPENDIX 1

# Maximum Permissible Concentrations

A.1.1 The concentrations shown below shall be the maximum permissible levels for the various isotopes mentioned, when found during Operation Mosaic. The values are based on the Recommendations of the International Commission on Radiological Protection and of the International Commission on Radiological Units.

A.1.2 When using these levels it must be remembered that the <u>inhalation</u> levels only are based on a working week of 56 hours spent in the ACTIVE areas. For differing exposure times the levels in <u>air will</u> be inversely proportional to the exposure times, e.g. for a 24 hour daily exposure the level in air for  $Sr^{90}$  will be  $2 \times 10^{-10}$  uc./c.c., instead of  $6 \times 10^{-10}$  uc./c.c.

Maximum Permissible Concentration			
Radio Isotope	Water (uc./c.c.)	Air (uc./c.c)	
H <sub>3</sub>	0.2	3 × 10.75	
$C^{14}(CO_2)$	3 × 10 <sup>-3</sup>	3 × 10 <sup>-5</sup>	
Na <sup>24</sup>	8 × 10 <sup>-3</sup>	3 × 10 <sup>-6</sup>	
A <sup>4 1</sup>	5 × 10 <sup>-4</sup>	1.5 × 10 <sup>-6</sup>	
Ca <sup>45</sup>	10⁻⁴	2.4 × 10 <sup>-8</sup>	
Sr <sup>89</sup>	7 × 10 <sup>-5</sup>	6 × 10 <sup>-6</sup>	
Sr <sup>9t</sup> + Y <sup>9r</sup>	8 × 10 <sup>-7</sup>	6 x 10 <sup>-10</sup>	
Yº 1	3 × 10 <sup>-4</sup>	2.7 × 10 <sup>-8</sup>	
Ru <sup>106</sup> + Rh <sup>106</sup>	10-4	6 × 10 <sup>-8</sup>	
I <sup>131</sup>	6 × 10 <sup>-5</sup>	1.8 x 10 <sup>-8</sup>	
Cs <sup>137</sup> + Ba <sup>137</sup>	2 × 10 <sup>-3</sup>	6 x 10 <sup>-7</sup>	
Ba <sup>140</sup> + La <sup>140</sup>	2 x 10 <sup>-4</sup>	5 × 10 <sup>-8</sup>	
Ce <sup>144</sup> + Pr <sup>144</sup>	10⁻⁴	6 × 10 <sup>-9</sup>	
Po210	3 × 10 <sup>-6</sup>	3 × 10 <sup>-10</sup>	
Rn <sup>222</sup>	-	3 × 10 <sup>-7</sup>	

Maximum Permissible Concentration			
Radio Isotope	Water (uc./c.c.)	Air(uc./c.c.)	
Ra <sup>226</sup> + 55% d.p.	4 × 10 <sup>-8</sup>	2.4 × 10 <sup>-11</sup>	
$Ac^{227} + d.p.$	5 × 10 <sup>-7</sup>	1.2 x 10-11	
Th Natural	4 × 10 <sup>-7</sup>	9 x 10 <sup>-11</sup>	
$Th^{234} + Pa^{234}$	2 × 10 <sup>-4</sup>	3 × 10 <sup>-8</sup>	
U Natural	2 × 10 <sup>-6</sup>	9 x 10 <sup>-11</sup>	
U <sup>233</sup>	3 × 10 <sup>-6</sup>	9 x 10 <sup>-11</sup>	
Pu <sup>239</sup>	3 × 10 <sup>-6</sup>	6 x 10 <sup>-12</sup>	
Weapon Debris	10-7	See note 1 below	
Any fission mixture (except from weapons) and any mixture of β-y emitters	10 <sup>-7</sup>	3 x 10 <sup>-9</sup> See note 5 below	
Any mixture of $\alpha$ emitters	10 <sup>-7</sup> See note 5 below	1.5 x 10 <sup>-11</sup> See note 5 below	

# Notes

- 1. Weapon Debris the maximum permissible levels are to be:
  - (a) In water (i)  $\alpha$  emitters  $10^{-7}$  uc./c.c (See Note 5(a) below)
    - (ii)  $\beta$  y emitters  $10^{-7}$  uc./c.c.
  - (b) In air (i)  $\alpha$  emitters

The concentration shown above for the most hazardous material likely to be found. (See also Note 5 below).

(ii)  $\beta - y$  emitters

15 min. - 210 days - m.p.l. = 
$$\frac{3.0 \times 10^{-6} \text{ uc./c.c.}}{\text{T}}$$

where T = Time in hours since the explosion. After 210 days -  $m_{\bullet}p_{\bullet}l_{\bullet} = 6 \times 10^{-10} \text{ uc./c.c.}$ -18-

CONTRACTOR AT CHAPTE

- 2. The figures given refer to the parent element. Where there is a daughter element, it is assumed that it reaches equilibrium with the parent after it is taken into the body. However, the figure of  $3 \times 10^{-7}$  uc./c.c. for radon refers to Rn + daughter products in the inhaled air and is thus an exception to the above rule.
- 3. The curie of natural uranium is considered to correspond to  $3.7 \times 10^{10}$  dis/sec. from  $U^{230}$ ,  $3.7 \times 10^{10}$  dis/sec. from  $U^{234}$  and  $9 \times 10^{0}$  dis/sec. from  $U^{235}$ . It is considered that none of the other daughter products of  $U^{230}$  is present at the time of ingestion or inhalation.
- 4. The curie of natural thorium is considered to correspond to  $3.7 \times 10^{10}$  dis/sec. from Th<sup>232</sup> and  $3.7 \times 10^{10}$  dis/sec. from Th<sup>220</sup>. It is considered that none of the other daughter products of Th<sup>232</sup> is present at the time of ingestion or inhalation.
- 5. The last two values listed are for "unidentified beta or gamma emitters" and "unidentified alpha emitters". They are safe for use over short periods of time (a few months) regardless of the radioactive contaminants. They are safe for indefinite use with the following exceptions:
  - (a) 10<sup>-7</sup> uc./c.c. of water is safe for any mixture of beta gamma emitters and all alpha emitters except Ra<sup>226</sup>.
  - (b)  $3 \times 10^{-9}$  uc./c.c. of air is safe for any mixture of beta gamma emitters except  $Sr^{90}$ .
  - (c)  $1.5 \times 10^{-11}$  uc./c.c. of air is safe for any mixture of alpha emitters except  $Pu^{239}$  and  $Ac^{227}$ .
  - (d) Fission products arising from nuclear explosions are covered under Note 1 above.

# APPENDIX 2

# Method of Making Smear Tests

A Whatman No. 1 (5.5 cm.) filter paper is used for this test.

The paper is slightly bent around the second finger by the two adjacent fingers so that a small area in the centre of the paper is brought into contant with the surface. It is then rubbed lightly over the area or object being checked.

# For Flat Surfaces

Rub paper in a circular motion covering an area of approximately six inches diameter, i.e. approximately 180 to 200 cm.

# For Irregular Shaped Objects: Door Handles, Telephones, etc.

Lightly rub paper over whole surface (if small enough), otherwise take a series covering the whole surface.

These "smears" are then placed in a standard type alpha or beta/gamma counter and counted.

Results are usually expressed as disintegrations/minute having applied the necessary factors for counter efficiency.

#### CONTIDENTIAL COLLEGE

# APPENDIX 3

# Removal of Radioactive Contamination from Hands

In many cases contamination will be removed by a normal washing of the hands in tepid water using a mild soap.

DO NOT RINSE HANDS IN WASHINGS AS THIS IS LIABLE TO BE CONTAMINATED.

If this procedure is not enough to remove contamination then scrubbing is necessary.

For this you should use the special brush provided in active change rooms.

A convenient routine for scrubbing hands is to start by scrubbing one thumb, being sure to brush all surfaces; proceed to the space between the thumb and first finger and similarly to each finger and the webs between the fingers.

Close fingers tightly together and serub in a downward direction from approximately one inch above the wrist, giving attention to the back and palm of the hand, and finally additional scrubbing of the nails and cuticles.

Rinse hands, as before, in fresh water direct from the tap.

This nail brush is most effective when used lightly; any extra pressure of this brush on the hands will only result in bending the bristles out of shape.

Always scrub in a direction away from the body into the basin. This is to prevent splashing of possible contaminated liquid on your clothes or on the floor.

IN ORDER TO PREVENT THE TRANSFER OF ACTIVITY FROM ONE SECTION OF THE HAND TO ANOTHER, THE BRUSH SHOULD BE WASHED IN FRESH WATER AND FRESH SOAP APPLIED AT LEAST THREE TIMES DURING THE SCRUBBING OF EACH HAND.

If the above procedure is not successful, then it should be repeated.

It is advisable to rub a small quantity of ROSALEX No. 4 on the hands after a vigorous scrubbing to soften the hands and prevent chapping.

DO NOT USE THIS CREAM BEFORE YOU HAVE SATISFIED YOURSELF THAT YOUR HANDS ARE FREE FROM CONTAMINATION.

It will probably not be necessary to use any more than the above scrubbing, but it contamination is very persistent more drastic techniques are available.

Whether these are used should be decided jointly by the Medical Officer and the Health Controller.

This procedure will be modified slightly for Operation Mosaic owing to the lack of ideal facilities that can be provided in the Islands.

#### APPENDIX 4

# Carriage of Radioactive Material

A.4.1 The only published regulations in the United Kingdom governing the carriage of Radioactive material are those made by the Ministry of Civil Aviation, which are in close agreement with the International recommendations. Regulations governing other forms of Transport have not yet been made. Codes of Practice recommended by AERE, Harwell have however been adopted by the authorities concerned in the United Kingdom. All regulations and Codes of Practice extant in the United Kingdom are given in Section A4.3 below. In Australia the Atomic Energy Commission of Australia is the body which gives advice on the handling and movement of Radioactive Materials. R.L. Group must be consulted about the arrangements for each consignant and will issue any necessary certificates.

A.4.2 Where consignments do not comply with the regulations or Codes of Practice, special arrangements must be made with the carrier concerned. Such consignments invariably require one or two escorts. The Health Physics authorities at the Establishment originating the consignment must be consulted about the arrangements for all such consignments, and will, in consultation with the consignor and the carrier, issue written instructions governing the carriage of the particular items.

# A.4.3 (i) Transport of Radioactive Materials by Rail (Code of Practice)

The basic requirement for rail transport is that the radiation at any point on the outer surface of the container may not exceed certain limits; as an interim measure, the railways are accepting packages which fall into two classes:

Class I. Radiation at any point on the surface not greater than 10 milliroentgens per 24 hours.

Class II. Radiation at any point on the surface greater than 10 milliroentgens per 24 hours, but not exceeding 100 milliroentgens per eight hours.

Special labels are used to designate these two classes. A class I package does not have to be separated from other freight carried in passenger trains, and is treated by the railways as an ordinary package, except that prior notice must be given to the railway authorities at the station from which it is to be consigned.

Class II packages have to be stowed in passenger trains at least 4 feet from any other goods. The label is designed so that this requirement is brought to the notice of all railway officials handling the package. Prior

#### CONTIDENTIAL COURS

notice must be given to the railways and on some routes at least 48 hours notice is required.

In order that an adequate check may be kept on the transport of these materials they are usually class as "Insured Goods" under a special rate. Packages are signed for at the consigning station, and should only be sent by direct through-routes to their destination.

Arrangements must be made for the immediate collection at the destination, and railways will not in any circumstances transport radioactive materials by their own vans. This means that the person to whom the isotopes are consigned should be notified in advance of the time of arrival of the train, and must be able to collect the material at this time from the station.

# A.4.3 (ii) Transport of Radioactive Materials by Road (Code of Practice)

- (a) The radiation level at the driver's seat, or at any seat occupied by a passenger, must be below 100 milliroentgens per eight hours (12½ milliroentgens per hour).
- (b) The radiation limit at any point on the outside of the car must be below 200 milliroentgens per hour.
- (c) A notice should be carried in the car stating that radioactive materials are being transported, and are packed in containers in the luggage compartments (or appropriate wording as applicable). An address and telephone number should be given, in order that the police may contact the owners of the vehicle immediately if there is an accident. The following notice (preferably RED letters on a WHITE or YELLOW background) should be carried by all transports carrying radioactive substances.

WARNING
THIS CAR IS CARRYING
RADIOACTIVE MATERIAL
THE MATERIAL IS PACKED IN SEALED CONTAINERS
THE CONTAINERS ARE SAFE TO HANDLE FOR
SHORT PERIODS PROVIDED THEY ARE UNDAMAGED
IN CASE OF ACCIDENT TO THIS CAR
COMMUNICATE AT ONCE WITH

Telephone Number:

# A.4.3(iii) Transport of Radioactive Materials by Sea (Code of Practice)

(a) Detailed regulations covering the transport of radioactive materials by sea have not yet been published but shipments are permitted subject to the approval of the United Kingdom Ministry of Transport and in Australia the Department of Defence Production and the State Government concerned.

Gamma radiation should not exceed 200 milliroentgens per hour at any point on the surface of the outside shipping container and 10 milliroentgens per hour at a distance of 1 yard from the container.

- (b) Applications to the Ministry should include the following information.
  - (a) Details of radioactive material including halflife.

(b) Details of packing used.

- (c) Radiation at surface of container in milliroentgens per hour.
- (d) Radiation at 1 yard from surface of container in milliroentgens per hour.
- (c) Radioactive materials are classified in the United Kingdom as "Category X-Other Dangerous Goods", as defined in the Merchant Shipping (Dangerous Goods) Rules, 1952. The provisions of Statutory Instrument 1952 No. 1977, issued by the United Kingdom Minister of Transport make it unlawful for dangerous goods to be taken on board any ship unless the owner or master of the ship has been supplied with a declaration of identity, packing and marking of the goods by the shipper. The use of the following standard form of declaration has been agreed by the United Kingdom Ministey of Transport.

"The herein-mentioned hazardous cargo is described and classified as set out in para. 2(1) of the Merchant Shipping (Dangerous Goods) Rules 1952 and we declare that the marking and packing of the goods are in accordance with paras. 3 and 4 of the Rules which are reproduced in sub para. (iii) (d) below.

- (d) Paras. 2, 3 and 4 of the Merchant Shipping (Dangerous Goods) Rules
  - 2. (1) It shall be unlawful for dangerous goods to be taken on board any ship to which

this Rule applies for carriage in the ship unless the shipper of the goods has furnished to owner or master of the ship with a statement in writing of the identity of the goods and of the nature of the danger to which the goods give rise, indicating to which of the following categories the goods belong:

(i) (ii) (iii) (iv) (v) (vi)	Explosives.
(ii)	Compressed, liquified and dissolved gases.
(iii)	Corrosives.
(iv)	Poisons.
(v)	Substances giving off inflammable vapours.
(vi)	Substances which become dangerous by
	interaction with water or air.
(vii)	Strong oxidising agents.
(vii) (viii)	Substances which are liable to spontaneous combustion.
(ix)	Laboratory chemicals and medicinal pre- parations in limited quantities,
(x)	Other dangerous goods.
\ <b>~</b> /	ONICE CONFOCUE ROOMS

For the purposes of these Rules a laboratory chemical or medicinal preparation shall be treated as being in a limited quantity if and only if the quantity of that chemical or preparation is a limited quantity for the purposes of Section 10 of the Report of the Department Committee appointed by the Minister of Transport to consider the Existing Rules relating to the Carriage of Dangerous Goods and Explosives in Ships, dated 13th November, 1951.

(2) The master of the ship shall cause a list to be carried in the ship setting forth, in accordance with the information furnished under the foregoing provisions of this Rule, the dangerous goods carried in the Ship on the voyage in which she is currently engaged.

#### Marking

(3) It shall be unlawful for dangerous goods, being goods contained in a vehicle, receptacle or package, to be taken on board a ship to which this Rule applies for carriage in that ship unless the vehicle, receptacle or package in which the goods are contained is clearly marked with a distinctive label or stencil purporting to indicate the nature of the danger to which the goods give rise, and if the goods are taken on board the ship at any port in the United Kingdom or within the territorial waters of the United Kingdom a label or stencil purporting to indicate the identity of the goods.

Where goods are taken on board a ship together with the vehicle in which they are contained, or where goods are taken on board a ship together with the receptacle in which they are contained, being a receptacle which is an additional body for a vehicle and is constructed or adapted for the purpose of being taken on or off the vehicle with goods contained therein, nothing in the foregoing provision of this Rule shall be taken to require any such receptacle or any package in which the goods in the vehicle may be contained, or, as the case may be, any package in which the goods in the receptacle may be contained, to be also marked.

# Packing and Carriage in Bulk

4. - (1) It shall be unlawful for dangerous goods being goods which are not loaded in bulk, to be taken on board any ship to which this Rule applies for carriage in that ship if the owner of the ship or any of his servants or agents knows or ought to know that the goods are not packed in a manner adequate to withstand the ordinary risks of handling and transport by sea having regard to their nature:

Provided that in any proceedings against an

# COMPLETE CONTRACTOR

owner or master in respect of a failure to comply with the provisions of this paragraph, it shall be a good defence to prove that before the goods were taken on board the ship:

- (a) The owner or master was furnished with a statement in writing by the shipper to the effect that the goods were packed in accordance with the requirements of this paragraph, and
- (b) neither the owner nor any of his servants or agents knew that the goods were not so packed.
- (2) It shall be unlawful for dangerous goods to be loaded in bulk into any ship to which this Rule applies for carriage in that ship if the owner of the ship or any of his servants or agents know or ought to know that the goods cannot safely be carried in bulk to the destination to which they are consigned.

# A.4.3 (iv) Transport of Radioactive Materials by Air - Ministry of Civil Aviation Regulations

The following conditions have been adopted by the United Kingdom to govern the carriage of radioactive materials in airgraft. These conditions are basically the same as the conditions recommended by the International Air Transport Association and adopted by the majority of airline companies. Radioactive materials are not classed as dangerous goods as defined in the Air Navigation Order, 1949 unless the amount of radioactivity exceeds the maxima stated in the conditions below.

#### Conditions Governing Carriage of Radioactive Materials in Aircraft

- (a) The carriage of radioactive materials is permitted in any aircraft in or over the United Kingdom and in any aircraft registered in the United Kingdom when flying outside the United Kingdom subject to compliance with the undermentioned conditions.
- (b) Radioactive materials are defined as any material or combination of materials which spontaneously emit ionizing radiation. For the purpose of these conditions, radioactive materials are divided into three groups by the type of radiation emitted at any time during carriage as follows:

- (i) Group I radioactive materials are those materials which emit any gamma radiation, either alone or with electrically charged particles or corpuscles.
- (ii) Group II radioactive materials are those materials which emit <u>neutrons</u> and either or both of the types of radiation characteristic of Group I radioactive materials.
- (iii) Group III radicactive materials are those materials which emit only electrically charged particles or corpuscles (i.e. alpha and/or beta radiation).
- (c) A unit of gamma radiation mentioned in these conditions means one milliroentgen per hour at a distance of one metre for "hard gamma" radiation (1 mrhm), i.e. the amount of gamma radiation which will have the same effect on sensitive photographic film as 1 milliroentgen per hour at a distance of one metre of "hard gamma" radiation of radium filtered through 1 inch of lead.
- (d) The maximum quantity of radicactive materials contained in one package for conveyance by either passenger or cargo aircraft shall be 2,000 millicuries and the maximum amount of radiation shall be 10 units. Not more that 40 units of radicactive materials Group I and II shall be carried on any one aircraft, provided that no quantity limitation is prescribed for Group III materials.
- NB In Australia, the Internal Airlines are limited to a maximum of only two parcels of R.A. materials of Groups I or II in any one aircraft.
- (e) All radioactive materials must be packed in sealed inner metal containers. Where the material is liquid it must in addition be packed in tight glass, carthenware, or other suitable inside containers surrounded on all sides, and within the shield, by sufficient absorbent material to absorb the entire contents. The outside shipping container must be a strong, rigid container having a minimum dimension of 4 inches on any one side, and of such design that the gamma radiation will not exceed 200 milliroentgens per hour or equivalent at any point of readily accessible surface.
- (f) Radioactive material consignments must be shielded in such a manner that the shield will maintain its efficiency under conditions normally incident to carriage as follows:
  - (i) Group I. The shield must be lead or other suitable material of such thickness that at all times gamma radiation at 1 metre does not exceed 10 milliroentgens per hour and must also be sufficient to prevent the escape of primary corpuscular radiation to the exterior of the outside shipping container.

- (ii) Group II. The shield must be such that at all times the radiation measured at right angles to any point on the long axis of the shipping container shall not exceed 10 mrhm of gamma radiation, or its physical equivalent in electrically charged corpuscular radiation, or neutron radiation which is the physical equivalent of 2 mrhm of gamma radiation. Where more than one type of radiation is present their total must not exceed the above limits.
- (iii) Group III. The shield must be such as to prevent the escape of primary corpuscular radiation to the exterior of the container, and secondary radiation at the surface of the container must not exceed 10 milliroentgens per 24 hours, at any time during carriage.
- (g) The following statement signed by the shipper of his authorised agent must accompany each package of radiactive material:

"This is to certify that the contents of this package are properly described by name and are packed and marked and are in proper conditions for carriage by air according to the regulations relating to the carriage of radioactive materials published by ... (carrier(s)) ... and otherwise comply with such regulations. This consignment is within the limitations prescribed for passenger-carrying aircraft."

(h) All packages of radiactive materials in Groups I and II shall have attached a label worded as follows:

"Do not place undeveloped film within 15 feet of this container.

Radioactive material.

Group I or II.

No person shall remain within 3 feet of this container unnecessarily.

Radiation units in this package ......

Not more than 40 units shall be loaded in one aircraft or held at one location or point."

In Australia not more than two packages may be loaded in one aircraft of the Australian Internal Airlines.

#### CONTIDUNTIAL/CUADD

- (j) The label may be varied in respect of consignments of Group I material handled solely by either the British Overseas Airways Corporation or the British European Airways Corporation where the total number of units carried in one aircraft does not exceed four. In these circumstances, where the number of units is one or under, the words "15 feet", " 3 feet" and "40 units" may be replaced by "5 feet", " 4 foot" and "1 unit" respectively. Where the number of units is over one but does not exceed four, the words "15 feet", "3 feet" and "40 units" may be replaced by "10 feet", "2 feet" and "4 units" respectively.
- (k) All packages of radioactive materials in Group III shall have attached a label worded as follows:

"Handle carefully
Radioactive material
Group III
Contents ......
Emitting corpuscular rays only."

#### Wing Tip Service

Limited amounts of gamma emitting radioactive materials can be transported, without lead shielding, in the wing tips of DC4 aircraft operated by South African Airways to South Africa, and in Argonaut aircraft operated by British Overseas Airways Corporation to the Near East, Middle East, Far East and South America. The maximum amount of radioactivity permitted depends upon the intensity of gamma radiation and flying time involved, but in no case can it exceed 300 millicuries. A standard size cylindrical wing-tip container. 1.7 inches diameter and 5.2 inches length, is in use which automatically restricts the physical quantities of materials which can be transported in this manner. Nevertheless, small amounts of radioactive materials can be transported long distances by wing-tip service at a lower cost than that involving the orthodox use of lead pots and wooden boxes.

Special handling procedures are used in the wing-tip service. Aircraft are loaded and unloaded by the airlines or their agents, but users must possess a suitable shielding container into which the wing-tip cylinder containing the radioactive material can be loaded at airport of arrival and transported safely to its final destination.

## A.4.3 (v) Postal Transport of Radioactive Materials (Code of Practice)

- (i) The packages used must have been approved by the G.P.O. Engineering Section.
- (ii) That the radiation at any point on the surface of the package is not greater than 10 milliroentgens per 24 hours.

#### CONTENTAL CUADO

# APPENDIX 5

# Bibliography

# Published in the United Kingdom

- (1) Recommendations of the International Commission on Radiological Protection.
- (2) A.E.R.E. Radioactive Materials and Stable Isotopes Catalogue No. 3, July, 1954.
- (3) Merchant Shipping (Dangerous Goods) Rules, 1952. Statutory Instrument 1952, No. 1977.
- (4) Ministry of Transport The Carriage of Dangerous Goods and Explosives in Ships (The Blue Book).
- (5) Ministry of Civil Aviation Conditions Governing the Carriage of Radioactive Materials in Aircraft.

VC/CIO/IR/180 Aldermaston