
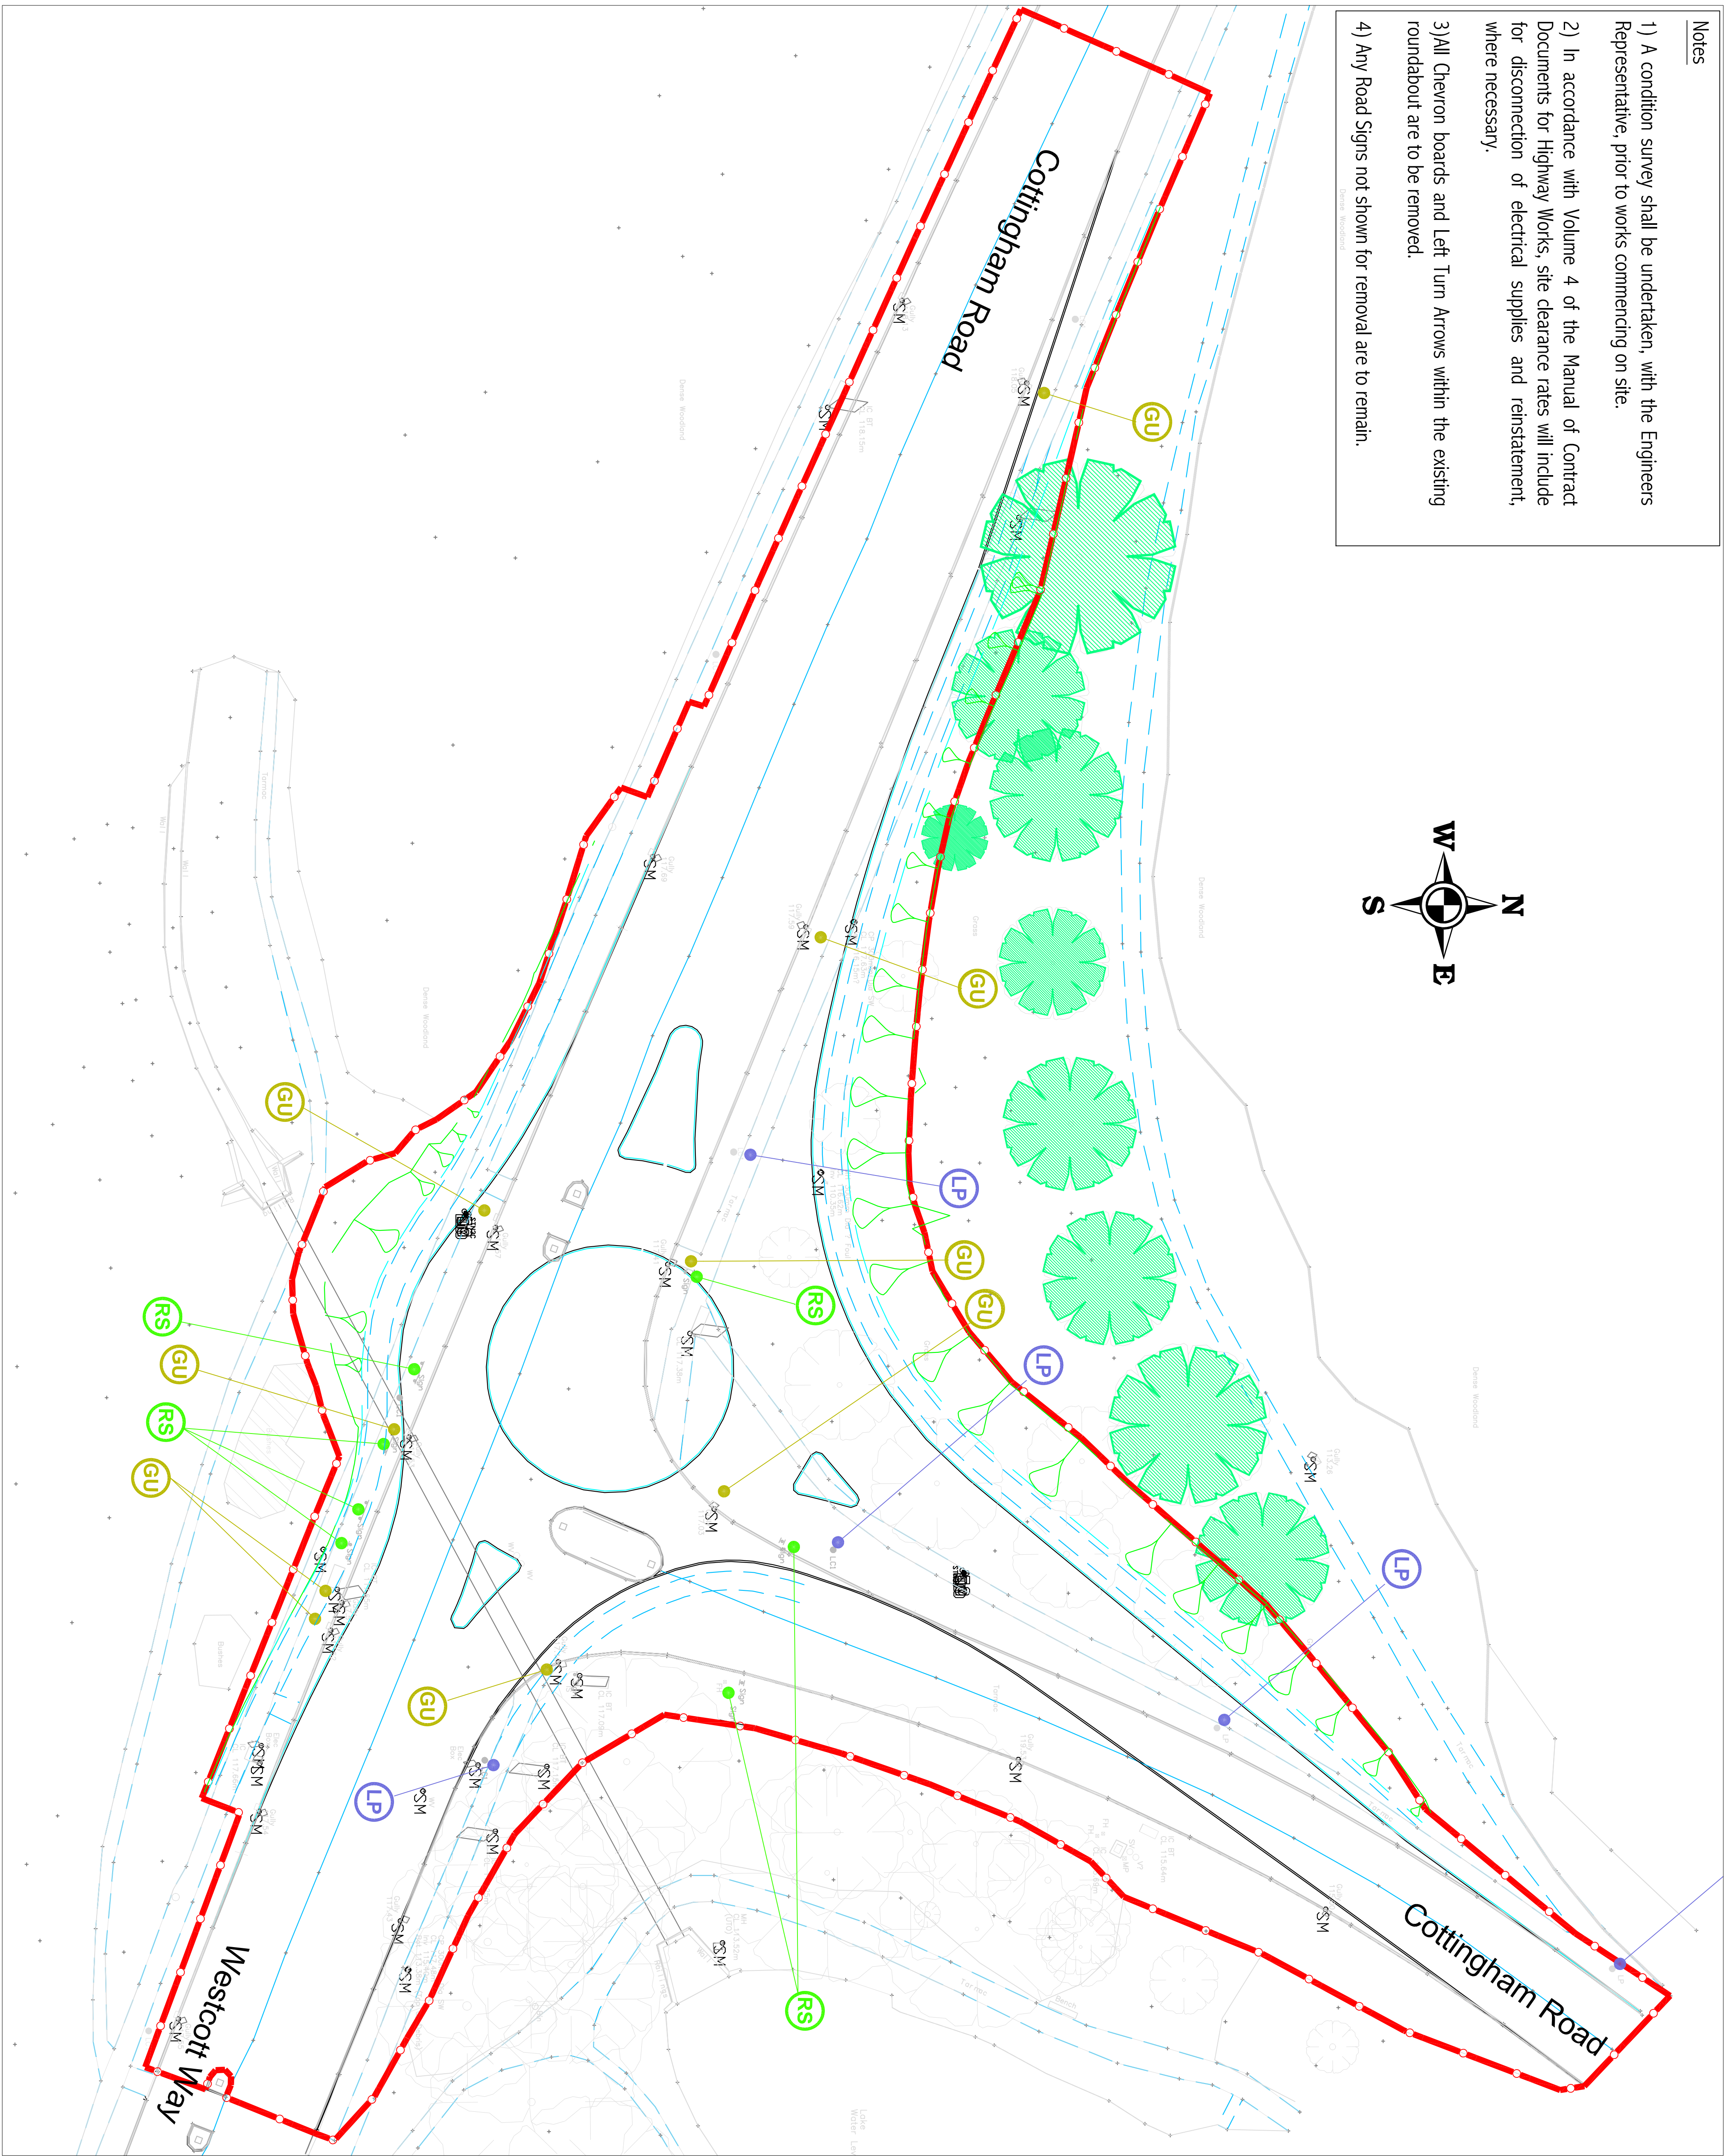


- Notes
- 1) A condition survey shall be undertaken, with the Engineers Representative, prior to works commencing on site.

2) In accordance with Volume 4 of the Manual of Contract Documents for Highway Works, site clearance rates will include for disconnection of electrical supplies and reinstatement, where necessary.

3) All Chevron boards and Left Turn Arrows within the existing roundabout are to be removed.

4) Any Road Signs not shown for removal are to remain.

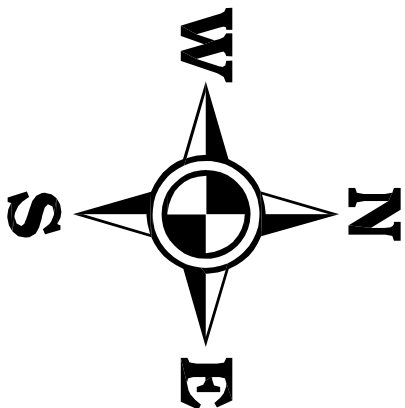

KEY

General Site Clearance Boundary

RS

Existing road sign and posts to be taken down and removed to tip

GU

Existing gully cover and frame to be removed to tip and backfilled with ST2 concrete

LP

Existing street lighting column to be taken down and removed to tip

RS

Existing road sign and posts to be taken down and set aside for re-use on new posts. Existing posts to be removed to tip

Existing tree to remain

The following are shown for information and clarity. They are included in General Site Clearance apart from set aside item

MGWSP

Northamptonshire County Council

Delivering transport and highways services together

PROJECT:

WESTCOTT WAY, CORBY

TITLE:

SITE CLEARANCE

SCALE @ A1:

1:250

CHECKED:

DESIGN-DRAWN:

DATE:

APPROVED:

15/01/10

PROJECT No:

NH09 DC09

DRAWING No:

S406/09/010

REV:

A

DRAWING STATUS:

TENDER

REV:

DATE:

BY:

DESCRIPTION:

CHECK:

DATE: